


# SecurEdge™ One Roof Edge System

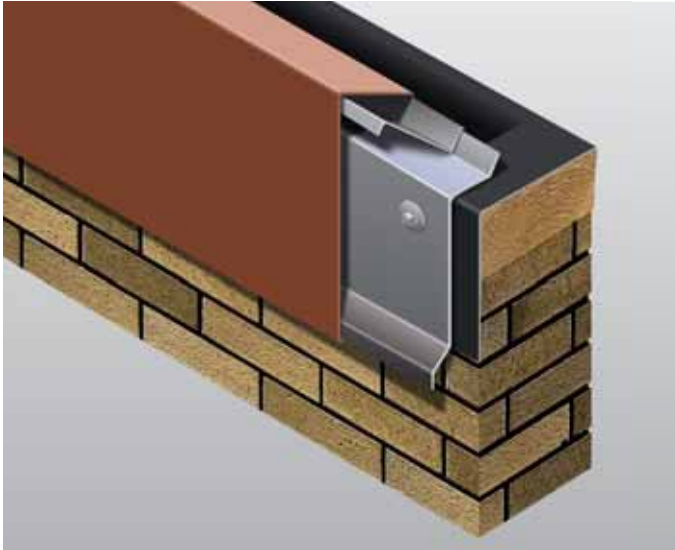

## Overview

Carlisle's SecurEdge One was designed with the contractor in mind, combining a highly engineered and tested product with quick-to-ship convenience and economical pricing. Carlisle's SecurEdge One will simplify your projects and maximize your profits.

SecurEdge One is manufactured and tested to provide the securement strength required for your building. For single-ply roofs, SecurEdge One protects against high wind events, saving your building from costly damage.

## Features and Benefits

- » Manufactured in 12' lengths, saving 20-40% in material handling when compared to 10' or 8' material
- » No need for the stripping-in or heat-welding that is typical with other systems
- » Can be used on parapet wall instead of coping, saving 67% material
- » Simple snap-on covers with no crimping necessary
- » ANSI/SPRI/FM-4435 ES-1 Tested to comply with International Building Code
- » FM Approved
- » Eligible for coverage under the Carlisle total roof system warranty

## Installation

For complete installation instructions, refer to Carlisle specifications and details, or visit [www.metalera.com/Carlisle](http://www.metalera.com/Carlisle).

## Finishes

- » Natural mill-finish aluminum
- » Pre-coat Kynar® 500 – from Carlisle's standard color chart
- » Premium metallic Kynar
- » Anodized aluminum – clear, bronze, and black
- » Custom post-painted Kynar finishes available upon request

## Quality Assurance

Tested per ANSI/SPRI Test Method RE-2 Pull-Off test for fascia. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems Used with Low Slope Roofing Systems. Meets International Building Code.

## Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

## Specifications

| Fascia Model | 'H' DIM         | 'X' DIM         | No. of Nailers Covered |
|--------------|-----------------|-----------------|------------------------|
| ESE-S40      | 4" (102 mm)     | 2 7/8" (73 mm)  | 1                      |
| ESE-S50      | 5" (127 mm)     | 3 7/8" (102 mm) | 2                      |
| ESE-S65      | 6 1/2" (165 mm) | 5 3/8" (140 mm) | 3                      |
| ESE-S80      | 8" (203 mm)     | 6 7/8" (178 mm) | 4                      |

# SecurEdge One Roof Edge System

