
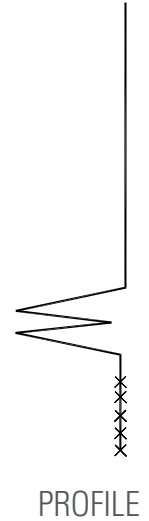
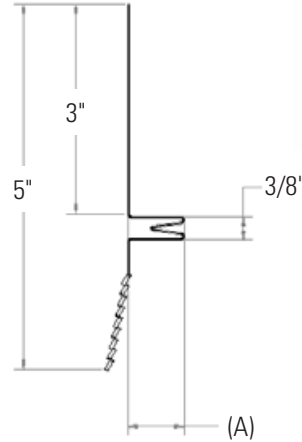


#15 SOLID LEG CONTROL JOINT SPECIFICATION

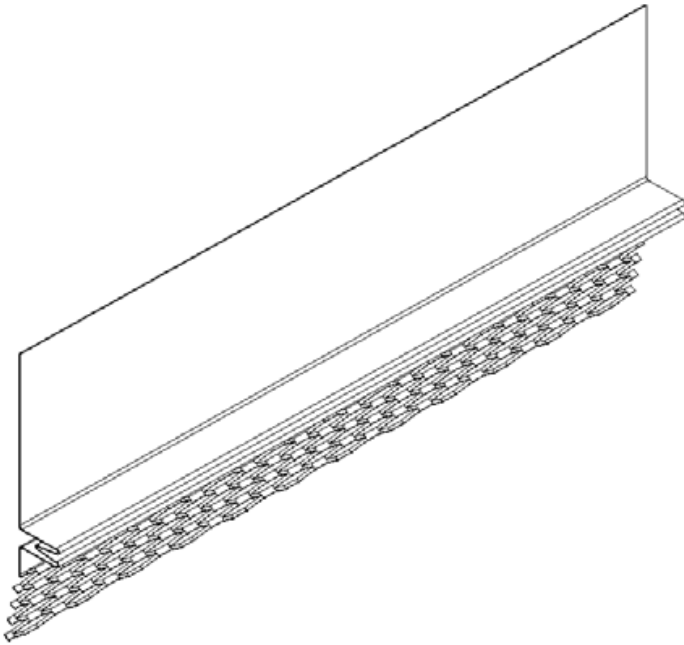

The **#15 SOLID LEG CONTROL JOINT** is manufactured for horizontal application on exterior plaster walls. The .30" gap in the V groove is designed to allow movement due to horizontal expansion and contraction of plastered walls. The 5" x 3/4" horizontal control joint has a 3" long upper solid flange that allows for water to weep out of the stucco cavity and a 1.5" long lower expanded metal flange that allows proper keying of plaster. The Control Joint is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel complying with ASTM A653 having a minimum G90 coating complying with ASTM A924 and ASTM C1063 (installation). **Water tested per ASTM E1105.**

Product Code	Size	Pcs / Ctn	Length	Ft / Ctn	Wt / Bundle	Ctn / Pallet
HWCJ34G90	3/4" (0.75")	15	10'	150	63 lbs.	40
HWCJ78G90	7/8" (0.875")	15	10'	150	63 lbs.	40

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.