


#3 FLASHING SCREED SPECIFICATION

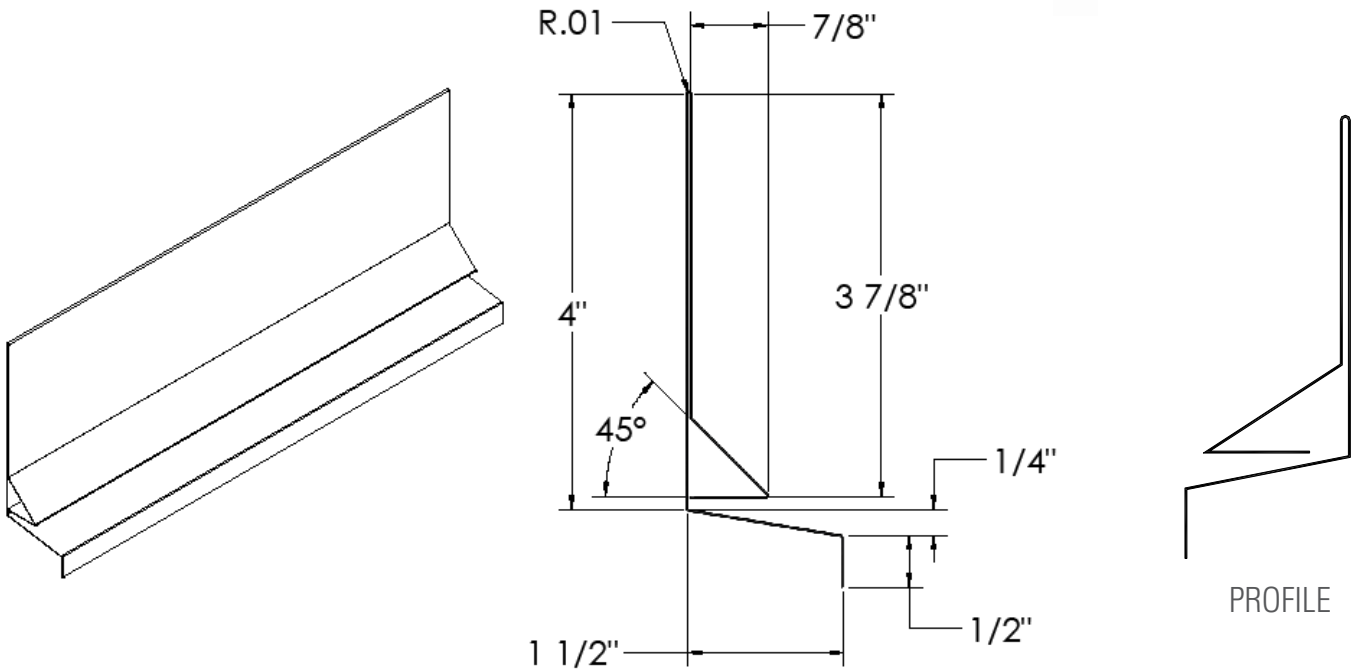

The **#3 FLASHING SCREED** is manufactured for applications above windows, doors and vents on exterior plaster walls. The #3 Flashing Screed consists of a combined single piece 45° weep screed, for drainage, and a Z flashing for window head protection.

The #3 Flashing Screed is part of CEMCO's Water Management Product Line of Stucco Accessories fabricated from minimum 0.018-inch thick hot-dipped galvanized steel complying with ASTM A653 having a minimum G-90 coating complying with ASTM A924 and ASTM C1063 (installation).

Product Code	Size	Pcs / Bundle	Length	Ft / Bundle	Wt / Bundle	Pcs / Pallet
WM3FSNH	7/8" (0.875")	10	10'	100	69 lbs.	250

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.