


#6 HEAD/FOUNDATION DRIP SCREED SPECIFICATION

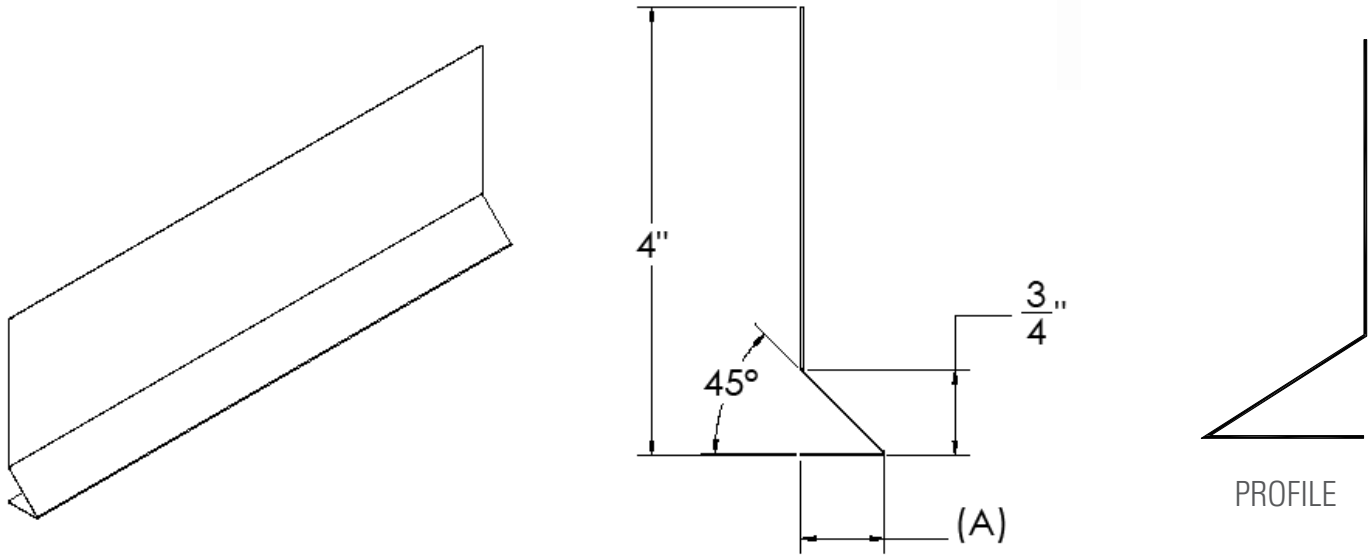

The **#6 HEAD DRIP SCREED** is manufactured for application above windows, doors, base of walls, and vents on exterior plaster walls. The 45° slope allows water to weep out of the assembly, and the 90° return provides a 3/4-inch solid metal leg for sealant application from stucco assembly to dissimilar materials. The #6 Head/Foundation Drip Screed is part of CEMCO's Water management Products of Stucco Accessories fabricated from hot dipped galvanized steel complying with ASTM A653 having a minimum G-90 coating complying with ASTM A924 and ASTM C1063 (installation). The screed is manufactured from minimum 0.018-inch thick steel.

Product Code	Size (A)	Pcs / Bundle	Length	Ft / Bundle	Wt / Bundle	Pcs / Pallet
WM6DH34	3/4" (0.75")	20	10'	200	84 lbs.	30
WM6DH78	7/8" (0.875")	20	10'	200	84 lbs.	30

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.