



Expanding Your Solutions

Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities
City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

CST SLOTTED TRACK WITH 3-1/4" LEGS (2" SLOTS) 33, 43, 54, & 68 MIL

Geometric Properties


"CST" brand slotted slip tracks are fabricated in following web depths and thicknesses with 2" slots for a 1" (+/-) vertical deflection. All CEMCO CST brand slotted slip tracks are produced from G40 coated steel 33 mil products and G60 for 43, 54 and 68 mil products. G90 is available upon request.

Steel Thickness

Mil Thickness	Design Thickness (in.) ¹	Minimum Thickness (in.) ^{1,2}	Color Code Painted on ends
33	0.0346 (0.88 mm)	0.0329 (0.84 mm)	White
43	0.0451 (1.15 mm)	0.0428 (1.09 mm)	Yellow
54	0.0566 (1.44 mm)	0.0538 (1.37 mm)	Green
68	0.0713 (1.81 mm)	0.0677 (1.72 mm)	Orange

Notes:

1. Uncoated Steel Thickness. Thickness is for carbon sheet steel.
2. Minimum thickness represents 95% of the design thickness and is the minimum acceptable thickness with 2012 AISI supplement.

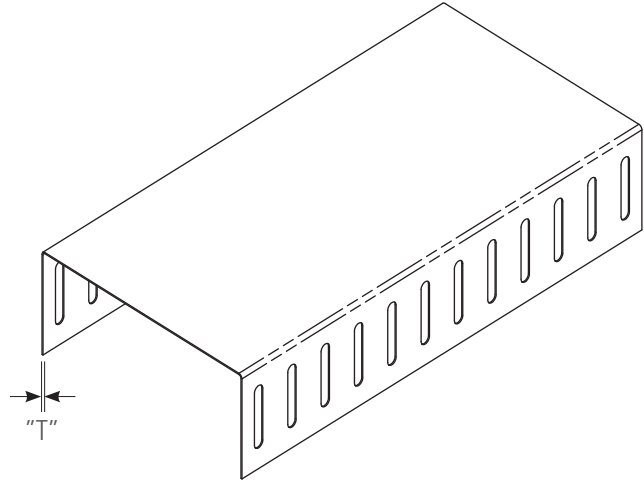

ASTM's & Code Standards

- ASTM A1003, A653, A924, C645, C754, C955
- ICC-ESR 2012
- IBC: 2012, 2015, 2018
- CBC: 2013, 2016
- AISI: S100-07, S100-12, S100-16, S200-12, S240-15

LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

3-1/4" Leg Allowable Lateral Loads

Slotted-Track Thickness	250CST325	362CST325	400CST325	600CST325	800CST325
33 mil	105	105	105	105	105
43 mil	195	195	195	195	195
54 mil	337	337	337	337	337
68 mil	486	486	486	486	486

Notes:

- 33 to 54 mil slotted track thickness use a #8 x 3/4" (minimum) wafer head screw for stud-to-track connection.
- 68 mil slotted track thickness use a #10 x 9/16" (minimum) wafer head screw for stud-to-track connection.
- Screws should be placed a minimum of 3/8" from the end of the stud.
- Allowable loads are also applicable for single stud located at minimum 6" from the end of the slotted track.
- Provide a minimum gap of 1" between end of stud and inside face of track.

Calculating Slotted Slip Track Point Load:

Point Load (P) = (wind pressure PSF) x (spacing FT) x (wall stud length FT) / 2

- **Step 1:** Calculate Point Load Based on Lateral Load Demand.
Example 1: (5 PSF) x (1.33 FT) x (12 FT) / 2 = 40 lbs.
Example 2: (30 PSF) x (1.33 FT) x (20 FT) / 2 = 400 lbs.
- **Step 2:** Use table to determine ideal slotted track thickness and respective capacity for calculated point load.
- **Step 3:** Refer to CEMCO's limiting wall height tables to select the proper stud framing to meet the lateral load demand.
- **Step 4:** If web crippling governs the selected stud (design point load), then web stiffeners might be required to achieve the maximum allowable leg point load.

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 14, 2019.

01-14-19 AT