



Expanding Your Solutions


Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities
City of Industry, CA
Commerce City, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

CORNERITE

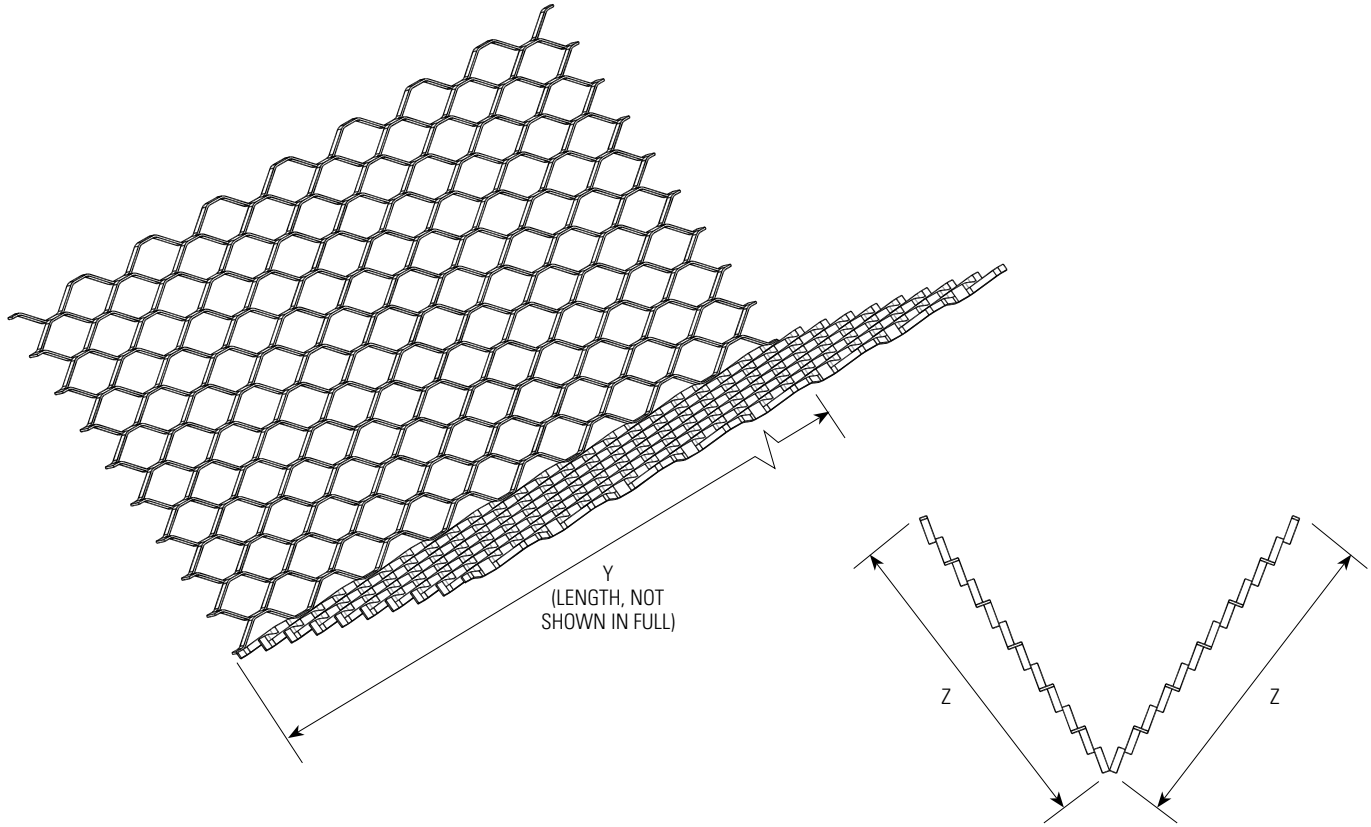

Properties

CEMCO's Cornerite is a smooth edge expanded metal lath corner reinforcement formed at a 105° angle to ensure a snug fit. This product also easily flattens for general patching. Cornerite is fabricated from 26 gauge galvanized steel in standard G60 coating.

Packaging

Product Code	Size (Z x Z x Y)	Weight / 1000'	Feet / Carton	Pieces / Carton	Carton / Pallet
224G	2" x 2" x 4'	70 lbs.	500'	125	20
228G	2" x 2" x 8'	70 lbs.	600'	75	18
334G	3" x 3" x 4'	105 lbs.	300'	75	18
338G	3" x 3" x 8'	105 lbs.	600'	75	18

ASTM & Code Standards:

- ASTM A653
- ASTM A924
- ASTM C840
- ASTM C1063
- IBC: 2021, 2024
- CBC: 2022

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

LEED Points and Recycled Content:

By using CEMCO steel framing products, your project can contribute to earning points for:

- LEED MR 2.1 & 2.2 – Construction Waste Management: up to 2 points
- LEED MR 4.1 & 4.2 – Recycled Content: up to 2 points
- LEED MR 5.1 & 5.2 – Regional Materials

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.