
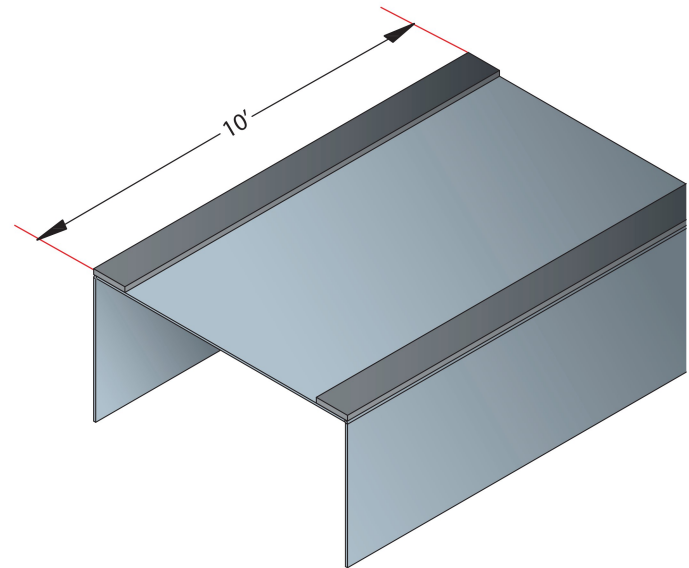


## FAS Track 1000 DL



CEMCO FAS Track 1000 DL is a deflection track with 1/2" Intumescent Tape that offers fire and air (smoke) protection. The section is fabricated from hot-dipped galvanized steel complying with ASTM A653, and ASTM A1003 Grade 33 Type H for 33 ksi yield strength steel for 20 gauge (33 mils) with a minimum G40 coating complying with ASTM A924, and 18 gauge (43 mils) with a minimum G60 coating complying with ASTM A924; and Grade 50 Type H for 50 ksi yield strength steel for 16 gauge (54 mils) with a minimum G60 coating complying with ASTM A924. CEMCO FAS Track 1000 DL has been tested with Underwritten Laboratories in accordance with UL 2079.

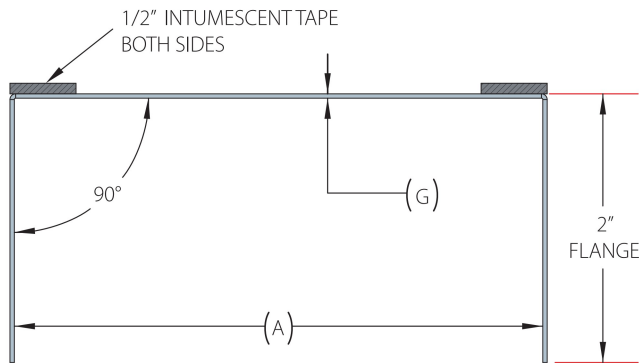

"A" Track Member Width (in)	Flange Size (in)	Length (ft)	Steel Thickness mils (gauge)
2-1/2, 3-5/8, 4, 6, 8	2	10	33, 43, and 54 (20, 18, and 16)

## FAS Track BT 1000

CEMCO FAS Track BT 1000 is a bottom track that offers fire and air (smoke) protection. The section is fabricated from hot-dipped galvanized steel complying with ASTM A653, and ASTM A1003 for 50 ksi yield strength steel for 20EQ (20/21 mils) with a minimum G40 coating complying with ASTM A924, ASTM A1003 for 33 ksi yield strength steel for 20 gauge (30 mils) with a minimum G40 coating complying with ASTM A924, and 18 gauge (43 mils) with a minimum G60 coating complying with ASTM A924; and Grade 50 Type H for 50 ksi yield strength steel for 54 mil (16 gauge) with a minimum G60 coating complying with ASTM A924.

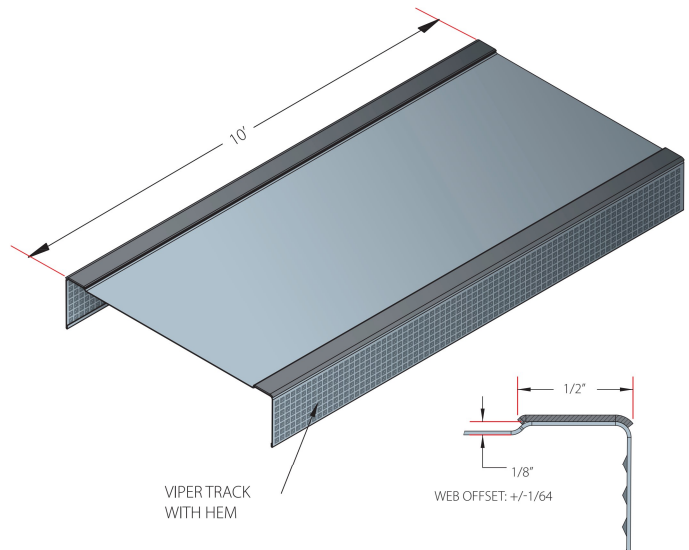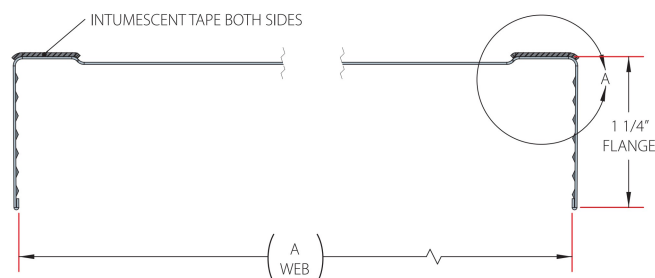

"A" Track Member Width (in)	Flange Size (in)	Length (ft)	Steel Thickness mils (gauge)
2-1/2, 3-5/8, 4, 6	1-1/4	10	20, 21, 30, 43 and 54 (20EQ, 19, 20, 18 and 16)