


Corporate Headquarters 13191 Crossroads Pkwy N., Ste 325 City of Industry, CA 91746 Phone: 800.775.2362 Fax: 626.330.7598 Manufacturing Facilities City of Industry, CA Denver, CO Ft. Worth, TX Pittsburg, CA Structural Engineering/Design

1001-A Pittsburgh Antioch Hwy Pittsburg, CA 94565 Phone: 800.775.2362 Fax: 626.330.7598 Technical Services 13191 Crossroads Pkwy N., Ste 325 City of Industry, CA 91746 Phone: 800.416.2278 Fax: 626.249.5004

FLAT STRAP SPECIFICATION - 10" x 68 mil (14FS10)

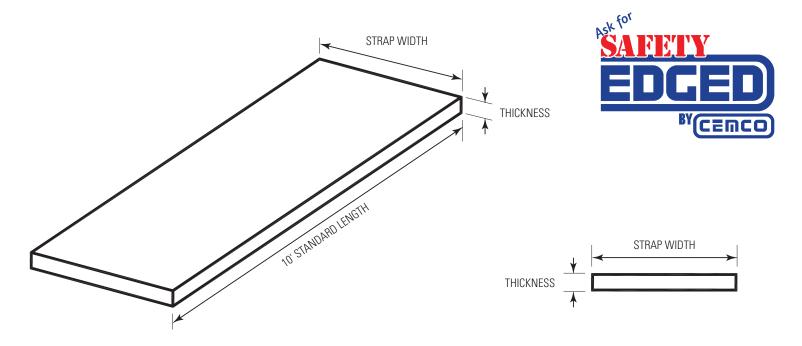

Geometric Properties

Product Code	Strap Width (in)	Thickness (mils)	Design Thickness (in)	Minimum Thickness (in)	Gauge	Yield Strength (ksi)	Tensile Values for Straps (Tn [lbs.])
14FS10	10	68	0.0713	0.0677	14	50	21347

Notes:

For lengths greater than 20 feet, strap is available in coil form.
 Flat Strap is also available with widths greater than 12 inches.

3. Ω = 1.67

4. Minimum thickness is equal to 95% of design thickness

Coating: Standard G60. G90 is available only upon special request and will require extended lead times.

ASTM & Code Standards:

- ASTM A653/A653M, A924/A924M, A1003/1003, C645 & C754
- IBC: 2012, 2015, 2018, 2021
- CBC: 2013, 2016, 2019, 2022
- AISI: S100, S200, S220, S240

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

Technical Services Technical Services: 800.416.2278 Structural Engineering/Design: 925.473.9340 www.cemcosteel.com







- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
 MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

