



Expanding Your Solutions




**Corporate Headquarters**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598

**Manufacturing Facilities**  
City of Industry, CA  
Denver, CO  
Ft. Worth, TX  
Pittsburg, CA

**Structural Engineering/Design**  
1001-A Pittsburg Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598

**Technical Services**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.416.2278  
Fax: 626.249.5004

# J-SERIES CASING BEAD SPECIFICATION

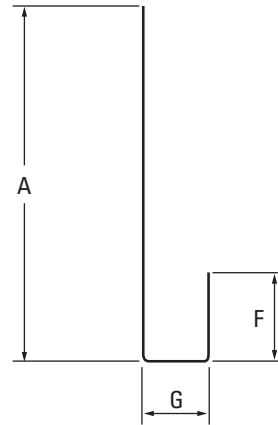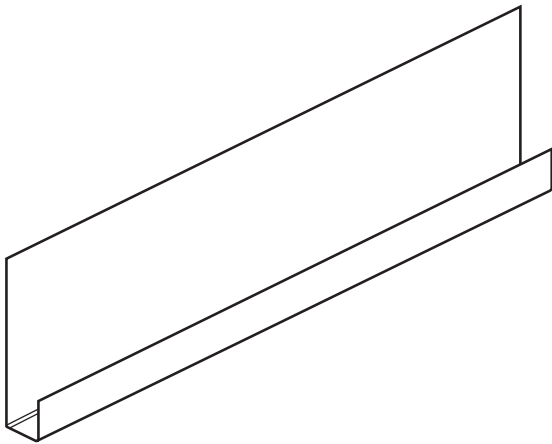

PROFILE

The **J-SERIES CASING BEAD** is manufactured non-perforated to enable the casing bead to have solid flashing capabilities. J-Series is part of CEMCO's Water Management Product of Stucco Accessories fabricated from minimum 0.018-inch thick hot-dipped galvanized steel complying with ASTM A653 having a minimum G-90 coating.

J-Bead Flange Depth (A)	Ground Width (G)	Casing Bead Lip (F)
2-1/2"	3/4" and 7/8"	1/4" and 1/2"
3-1/2"	3/4" and 7/8"	1/4"

**Technical Services**  
Technical Services: 800.416.2278  
Structural Engineering/Design: 925.473.9340  
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective June 18, 2018.  
06-18-18 AT