



Expanding Your Solutions




Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities
City of Industry, CA
Commerce City, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

J-SERIES CASING BEAD SPECIFICATION

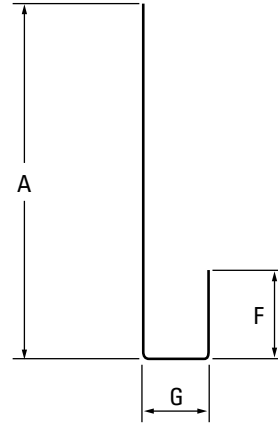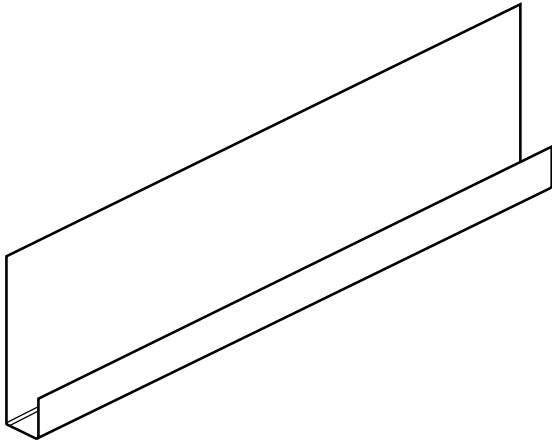

PROFILE

The **J-SERIES CASING BEAD** is manufactured non-perforated to enable the casing bead to have solid flashing capabilities. J-Series is part of CEMCO's Water Management Product of Stucco Accessories fabricated from minimum 0.018-inch thick hot-dipped galvanized steel complying with ASTM A653 having a minimum G-90 coating complying with ASTM A924 and ASTM C1063 (installation).

Series	Product Code	J-Bead Flange Depth (A)	Ground Width (G)	Casing Bead Lip (F)
J-2 Series	WMJ2503414	2-1/2"	3/4"	1/4"
	WMJ2507814	2-1/2"	7/8"	1/4"
J-2.5 Series	WMJ2503412	2-1/2"	3/4"	1/2"
	WMJ2507812	2-1/2"	7/8"	1/2"
J-3.5 Series	WMJ3503414	3-1/2"	3/4"	1/4"
	WMJ3507814	3-1/2"	7/8"	1/4"

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.