



Expanding Your Solutions

**Corporate Headquarters**  
13191 Crossroads Parkway North, Suite 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598

**Manufacturing Facilities**  
City of Industry, CA  
Denver, CO  
Ft. Worth, TX  
Pittsburg, CA


**Structural Engineering/Design**  
1001-A Pittsburgh Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598

**Technical Services**  
263 North Covina Lane  
City of Industry, CA 91744  
Phone: 800.416.2278  
Fax: 626.249.5005

# "NT" NOTCHED-TRACK

## Geometric Properties

"NT" Notched-Tracks are fabricated in several thicknesses for various stud flange widths. All CEMCO notched-tracks are manufactured with 1-1/4" or 1-1/2" legs, with 1-3/4" notches. Notched-Tracks come in 9' 4" and 10' 8" lengths for 16" on-center configurations, and 10' for 24" on-center. Notched-Tracks are produced from hot-dipped galvanized steel in standard G60 coating weight. G90 is available upon special request.

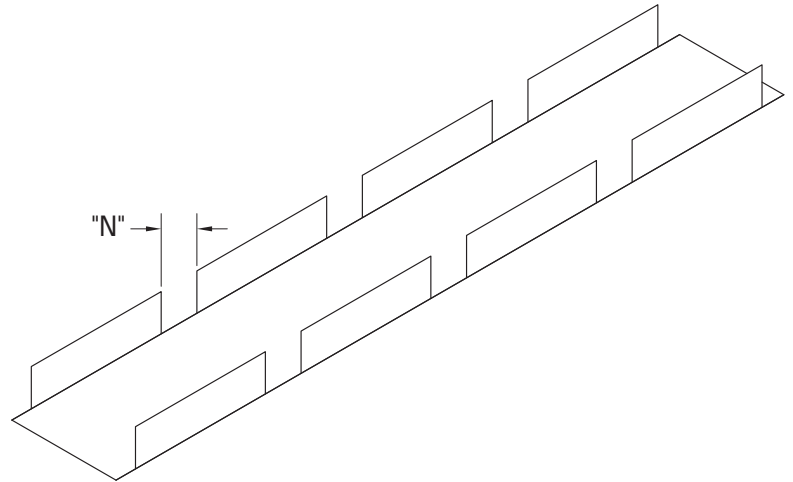


Mil Thickness	Design Thickness <sup>1</sup>	Minimum Thickness <sup>1,2</sup>	Yield	Web Sizes (in)	Flange (in)
33	0.0346" (0.88mm)	0.0329" (0.84mm)	33	3-5/8, 4, 6, 8	1-1/4, 1-1/2
43	0.0451" (1.15mm)	0.028" (1.09mm)	33	3-5/8, 4, 6, 8	1-1/4, 1-1/2
54	0.0566" (1.44mm)	0.0538" (1.37mm)	50	3-5/8, 4, 6, 8	1-1/4, 1-1/2
68	0.0713" (1.81mm)	0.0677" (1.72mm)	50	3-5/8, 4, 6, 8	1-1/4, 1-1/2

**Notes:**  
1. Uncoated Steel Thickness. Thickness is for carbon sheet steel.  
2. Minimum Thickness represents 95% of the design thickness and is the minimum acceptable thickness delivered to the job site, based on Section A3.4 of the AISI 2012.

## Color Code (painted on ends):

- 33-mil: White
- 43 mil: Yellow
- 54 mil: Green
- 68 mil: Orange

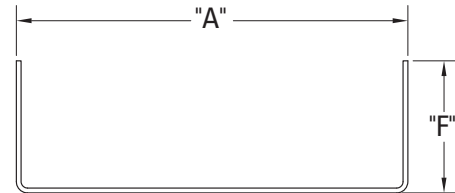

## ASTM's & Code Standards

- ASTM A1003, A653, A924
- IBC: 2012, 2015, 2018
- CBC: 2013, 2016, 2019
- AISI: S100-07, S100-12, S100-16, S220-11, S220-15

## LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

## CEMCO cold-formed steel framing products contain 30% to 37% recycled steel

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

## Technical Services

Technical Services: 800.416.2278  
Structural Engineering/Design: 925.473.9340  
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective February 23, 2022.

02-23-22 AT