

Corporate Headquarters

13191 Crossroads Pkwy N., Ste 325 City of Industry, CA 91746 Phone: 800.775.2362 Fax: 626.330.7598

Manufacturing Facilities

City of Industry, CA Denver, CO Ft. Worth, TX Pittsburg, CA


Structural Engineering/Design

1001-A Pittsburgh Antioch Hwy Pittsburg, CA 94565 Phone: 800.775.2362 Fax: 626.330.7598

Technical Services

13191 Crossroads Pkwy N., Ste 325 City of Industry, CA 91746 **Phone:** 800.416.2278 **Fax:** 626.249.5004

NO. 34 FOUNDATION SILL SCREED

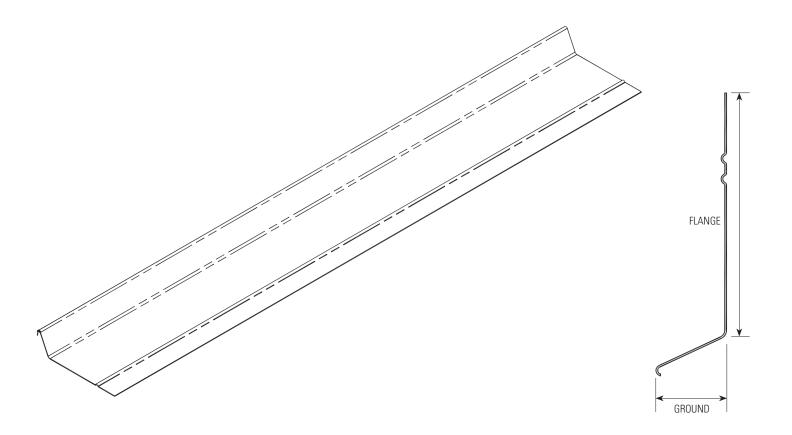

Properties

CEMCO's No. 34 Foundation Sill Screed is commonly known as FHA Screed due to its meeting of FHA requirements. Nailed or stapled to the sill plate provides a straight line stucco stop. No. 34 Foundation Sill Screed is fabricated from 26 gauge galvanized steel in standard G60 coating. G90 coating is available upon request.

Packaging

Size	Ground (G)	Steel Thickness	Flange Size	Wt. / Mlf.	Length	Pieces / Bundle	Pieces / Pallet
5-1/2"	7/8"	0.019"	3-1/2"	307 lbs.	10'	10	1000

ASTM & Code Standards:

- ASTM A653
- ASTM A924
- ASTM C1063
- IBC: 2012, 2015, 2018
- CBC: 2013, 2016
- AISI: S100-07, S100-12, S100-16, S220-11, S220-15

LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

■ Total Recycled Content: 36.9%

■ Post-Consumer: 19.8%

■ Pre-Consumer: 14.4%



Technical Services: 800.416.2278 Structural Engineering/Design: 925.473.9340 www.cemcosteel.com





