

# 15/16" EZ STAB CLASSIC ENVIRONMENTAL SYSTEM


## Acoustical Suspension Systems

The EZ Stab Classic Environmental System is ideal for areas where high humidity or extreme environments exist, such as parking garages and commercial kitchens.


### MAIN RUNNER



### CROSS TEE

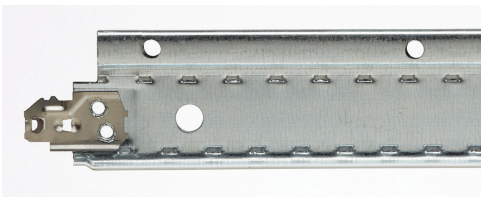


### 7/8" WALL ANGLE




### FEATURES AND BENEFITS

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- EZ Stab clip technology allows for a fast and strong connection on cross tees with added removability
- Enhanced stitching increases stiffness, reducing bending or twisting
- Available in white only
- Suitable for all seismic applications
- Grid features G60 hot-dipped galvanized steel web construction with aluminum capping for high-humidity environments
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Uses standard 7/8" wall angle and shadow molding

### MAIN RUNNER



### WALL ANGLE



### LEED® v4

#### RECYCLED CONTENT

#### MAIN RUNNER

PRE: 25% POST: 31% TOTAL: 56%

#### CROSS TEE

PRE: 24% POST: 31% TOTAL: 55%

#### WALL ANGLE

PRE: 9% POST: 44% TOTAL: 53%

☒ MR: PBT Source Reduction (Healthcare)

☐ MR: Material Ingredients (HPDs)

☒ MR: Sourcing Raw Materials

☐ MR: Environmental Product Declarations (EPDs)

☒ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

# 15/16" EZ STAB CLASSIC ENVIRONMENTAL SYSTEM











## Acoustical Suspension Systems

	Grid Face (in.)	Dimensions (in.)	Slot Spacing (in.)	Pieces/carton	Ft./carton	Seismic Design Category	Structural Classification (ASTM C635)	Recycled Content PRE*	Recycled Content POST*	Recycled Content TOTAL*	Allowable Uniform Load (plf)	Allowable Concentrated Load at midspan (lbf)**
<b>MAIN RUNNER</b>												
EZEVS12-12-15-G60	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-C	ID	25%	31%	56%	12.05	30.13
EZEVS12-12-20-G60	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-F	HD	25%	31%	55%	16.7	41.72
<b>CROSS TEE</b>												
EZEVS2-12-12-G60	15/16	24 x 1-1/2 x 15/16	—	60	120	—	—	24%	31%	55%	36.14	45.18
EZEVS4-12-12-G60	15/16	48 x 1-1/2 x 15/16	12 O.C.	60	240	—	—	24%	31%	55%	8.98	22.44
<b>WALL ANGLE - ALUMINUM</b>												
WA14-14SAL	7/8	144 x 7/8 x 7/8	—	40	480	—	—	9%	44%	53%	—	—

\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

## ACCESSORIES

SEISMIC		SLEEVE1516	15/16" Sleeve	4 x 15/16 x 1/64 (102 x 24 x 1)	White	100	1.25
		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
STANDARD		AHD	Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	1000	16
		OC15-1	Outside Corner Cap 15/16" (24 mm)	2-1/4 x 2-1/4 x 1/64 (58 x 58 x 1)	White	100	3
		IC15-1	Inside Corner Cap 15/16" (24 mm)	2-1/4 x 2-1/4 x 1/64 (58 x 58 x 1)	White	100	3
		HW12	Hanger Wire 12" (3660 mm) 12 Gauge (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		DLC	Direct Load Clip	1-1/8 x 3-1/16 x 1/16 (29 x 78 x 2)	Metal	150	9
		EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9

## PHYSICAL DATA

### MATERIAL

Hot dipped galvanized steel (G60)

### FACE DIMENSION

15/16"

### CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

### LOAD CLASSIFICATION

Heavy duty and Intermediate duty per ASTM C635

### SURFACE FINISH

Painted Aluminum Cap

### PROFILE HEIGHT

1-1/2"

### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

### SEISMIC RATING

A, B, C, D, E, F

### WARRANTY

10-year Limited Suspension Systems warranty increases to 15 years when installed with CertainTeed ceiling panels. Full warranty information can be found at [certainteed.com/ceilings](http://certainteed.com/ceilings).

## SEISMIC PERFORMANCE

### MAIN RUNNERS:

EZEVS12-12-20-G60, EZEVS12-12-15-G60

### MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

### CROSS TEES:

EZEVS2-12-12-G60, EZEVS4-12-12-G60

## ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/ceilings](http://certainteed.com/ceilings) for current reports.



### CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM  
20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 [certainteed.com](http://certainteed.com)