

# 15/16" CLASSIC ENVIRONMENTAL STAB SYSTEM

## Acoustical Suspension Systems

The Classic Environmental Stab System is ideal for areas where high humidity or extreme environments exist, such as parking garages and commercial kitchens.


### MAIN RUNNER



### CROSS TEE




### 7/8" WALL ANGLE




### FEATURES AND BENEFITS

- Double web design for lasting durability and strength
- Cross tees are override or stepped end
- Cross tees feature staked-on end tabs for optimal tightness and ease of installation
- Available in white only
- Suitable for all seismic applications
- High recycled content
- Grid features G60 hot-dipped galvanized steel web construction with aluminum capping for high-humidity environments
- ICC certified (ESR-3336) and compliant with L.A. Research Report number 25978
- Uses standard 15/16" wall angle and shadow molding


### MAIN RUNNER



### WALL ANGLE



### SHADOW MOLDING

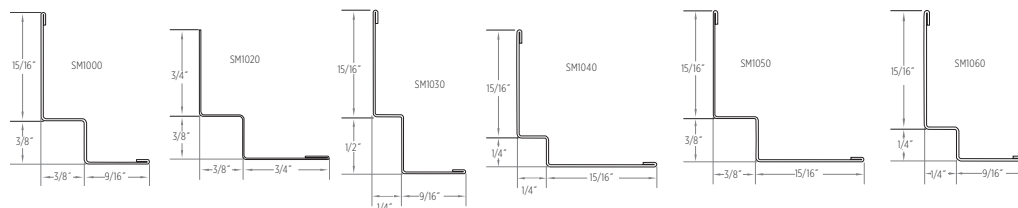

### LEED® v4

#### RECYCLED CONTENT

#### MAIN RUNNER

PRE: 19% POST: 69% TOTAL: 87-88%

#### CROSS TEE

PRE: 19% POST: 69% TOTAL: 88%

#### WALL ANGLE

PRE: 19% POST: 69% TOTAL: 88%

- ☒ MR: PBT Source Reduction (Healthcare)
- ☐ MR: Material Ingredients (HPDs)
- ☒ MR: Sourcing Raw Materials
- ☐ MR: Environmental Product Declarations (EPDs)
- ☒ MR: Construction and Demolition Waste Management Planning

# 15/16" CLASSIC ENVIRONMENTAL STAB SYSTEM

## Acoustical Suspension Systems

	Grid Face (in.)	Dimensions (in.)	Slot Spacing (in.)	Pieces/ carton	Ft./ carton	Seismic Design Category	Structural Classification (ASTM C635)	Recycled Content PRE*	Recycled Content POST*	Recycled Content TOTAL*	Allowable Uniform Load (plf)	Allowable Concentrated Load at midspan (lbf)**
<b>MAIN RUNNER</b>												
<b>EVS12-12-15-G60</b>	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-C	ID	25%	31%	56%	12.05	30.13
<b>EVS12-12-20-G60</b>	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-F	HD	25%	31%	55%	16.7	41.72
<b>CROSS TEE</b>												
<b>EVS2-12-12-G60</b>	15/16	24 x 1-1/2 x 15/16	—	60	120	—	—	24%	31%	55%	36.14	45.18
<b>EVS4-12-12-G60</b>	15/16	48 x 1-1/2 x 15/16	12 O.C.	60	240	—	—	24%	31%	55%	8.98	22.44
<b>WALL ANGLE - ALUMINUM</b>												
<b>WA14-14SAL</b>	7/8	144 x 7/8 x 7/8	—	40	480	—	—	19%	69%	88%	—	—
<b>SHADOW MOLDING</b>												
<b>SM1000</b>	—	120 x 7/8 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
<b>SM1020†</b>	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
<b>SM1030</b>	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
<b>SM1040</b>	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
<b>SM1050</b>	—	120 x 15/16 x 3/8 x 3/8 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
<b>SM1060</b>	—	120 x 15/16 x 1/4 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—

†SM1020 is not hemmed along 3/4" side











\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load. Use Standard 15/16" Wall Angle and Shadow Molding

# 15/16" CLASSIC ENVIRONMENTAL STAB SYSTEM

## Acoustical Suspension Systems

### ACCESSORIES

		Item Number	Product Name	Dimensions L" x W" x H" (mm)	Color	Pieces/ carton	Lbs./ carton
SEISMIC		SLEEVE1516	15/16" Sleeve	4 x 15/16 x 1/64 (102 x 24 x 1)	White	100	1.25
		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
STANDARD		AHD	Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	1000	16
		OC15-1	Outside Corner Cap 15/16" (24 mm)	2-1/4 x 2-1/4 x 1/64 (58 x 58 x 1)	White	100	3
		IC15-1	Inside Corner Cap 15/16" (24 mm)	2-1/4 x 2-1/4 x 1/64 (58 x 58 x 1)	White	100	3
		HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		DLC	Direct Load Clip	1-1/8 x 3-1/16 x 1/16 (29 x 78 x 2)	Metal	150	9
		SLOTTER1	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9

### PHYSICAL DATA

#### MATERIAL

Hot dipped galvanized steel (G60)

#### FACE DIMENSION

15/16"

#### CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

#### LOAD CLASSIFICATION

Heavy duty and Intermediate duty  
per ASTM C635

#### SURFACE FINISH

Painted Aluminum Cap

#### PROFILE HEIGHT

1-1/2"

#### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

#### SEISMIC RATING

A, B, C, D, E, F

#### WARRANTY

10-year Limited Suspension Systems  
warranty increases to 15 years when  
installed with CertainTeed Ceiling Panels.  
Full warranty information can be found  
at [certainteed.com/ceilings](http://certainteed.com/ceilings).

### SEISMIC PERFORMANCE

#### MAIN RUNNERS:

EVS12-12-20-G60, EVS12-12-15-G60

#### MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

#### CROSS TEES:

EVS2-12-12-G60, EVS4-12-12-G60

### ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed Ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed Ceilings suspension systems have been reviewed and are approved by listing in L.A. Research Report number 25978. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/ceilings](http://certainteed.com/ceilings) for current reports.