


# 15/16" EZ STAB CLASSIC ALUMINUM CAPPED SYSTEM

## CEILING & WALLS ACOUSTICAL SUSPENSION SYSTEMS


MAIN RUNNER



CROSS TEE

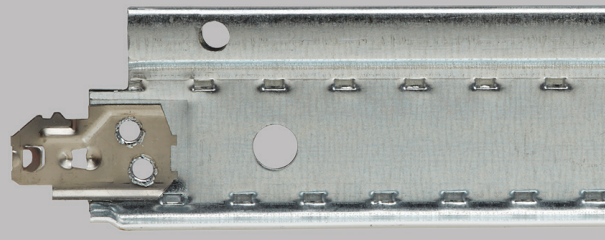

7/8" WALL ANGLE



The EZ Stab Classic Aluminum Capped System is for areas where moisture is a concern, such as commercial kitchens, laboratories and sanitary spaces.

### FEATURES AND BENEFITS

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Enhanced stitching increases stiffness, reducing bending or twisting
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Suitable for all seismic applications
- Satisfies USDA/FSIS guidelines for sanitary applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Available in Standard White and Black. Additional color options are offered through our Post-Paint process. See the Visual Options - Suspension Systems page for color option details.

### LEED® v4


RECYCLED CONTENT

up to 86%


- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

MAIN RUNNER



WALL ANGLE

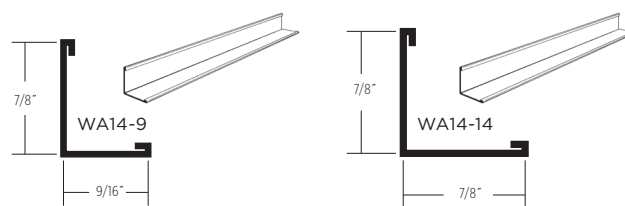

### CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE

HPD AVAILABLE

Declare<sup>SM</sup>

Living Building Challenge Red List Free<sup>®</sup>

ARCHITECTURAL

**CertainTeed**  
SAINT-GOBAIN

# 15/16" EZ STAB CLASSIC ALUMINUM CAPPED SYSTEM

	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
<b>MAIN RUNNERS</b>												
EZACS12-12-15	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-C	ID	25%	32%	57%	12.05	30.13
EZACS12-12-20	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A-F	HD	25%	32%	57%	16.7	41.72
<b>CROSS TEE</b>												
EZACS2-12-12	15/16	24 x 1-1/2 x 15/16	—	60	120	—	—	25%	33%	58%	36.14	45.18
EZACS4-12-12	15/16	48 x 1-1/2 x 15/16	12 O.C.	60	240	—	—	25%	33%	58%	8.98	22.44
<b>WALL ANGLE</b>												
WA14-14SAL (Aluminum)	7/8	144 x 7/8 x 7/8	—	40	480	—	—	9%	44%	53%	—	—
WA14-14	7/8	144 x 7/8 x 7/8	—	40	480	—	—	19%	69%	88%	—	—
<b>FLEXIBLE WALL ANGLE*</b>												
FWA14-14	7/8	96 x 1-1/8 x 7/8	—	63	504	—	—	19%	69%	88%	—	—







\*Flexible Wall Angle is made of Rigid PVC

\*\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with ACS368 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.







To specify color other than white, order by item number followed by color code. Example: EZACS12-12-15 BLK. Color List: Black - BLK, Beige Breeze - BEB, Blondewood - BLW, Silver Lining - SIL, Wet Clay - WEC, White Wash - WIW. Flex Wall Angle will fit a 5-1/2" radius or larger.

## MAXIMUM FIXTURE WEIGHT

ITEM NUMBER	CONFIGURATION		FIXTURE		HANGER SPACING		MAXIMUM WEIGHT	
	A	B	A	B	A	B	A	B
Main Runner to Main Runner – Drawing Key: Main Runner ( ) Cross tee (---) Hanger wire (+)								
EZACS4-12-12			24" x 48"	24" x 48"	48"	48"	56.00 lbs.	51.00 lbs.
EZACS4-12-12			24" x 48"	24" x 48"	48"	48"	44.50 lbs.	34.50 lbs.
EZACS4-12-12			24" x 24"	24" x 24"	48"	48"	21.50 lbs.	28.50 lbs.

Cross tee tested as follows: EZACS4-12-12 tested at 8.98 lbs/LF to 1/360 of 4' span.

## ACCESSORIES

	ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/CARTON	LBS./CARTON
SEISMIC	 SLEEVE1516	15/16" Sleeve	4 x 15/16 x 1/64 (102 x 24 x 1)	White	100	1.25
	 CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
	 CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
STANDARD	 AHD	Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	1000	16
	 OC-14	7/8" Outside Corner Cap	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10
	 IC-14	7/8" Inside Corner Cap	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10
	 HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
	 DLC	Direct Load Clip	1-1/8 x 3-1/16 x 1/16 (29 x 78 x 2)	Metal	150	9
 EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5	
 SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9	

# 15/16" EZ STAB CLASSIC ALUMINUM CAPPED SYSTEM

## PHYSICAL DATA

**CROSS TEE/MAIN RUNNER MATERIAL**  
Hot dipped galvanized steel (G30)

**FACE DIMENSION**  
15/16"

**CROSS TEE/MAIN RUNNER INTERFACE**  
Stepped-end/Override

**DUTY CLASSIFICATION**  
Heavy duty and Intermediate duty  
per ASTM C635

**CROSS TEE/MAIN RUNNER  
SURFACE FINISH**  
Painted Steel Cap

**PROFILE HEIGHT**  
1-1/2"

**VOC EMISSIONS**  
Independently certified compliant with  
California Department of Public Health  
CDPH/EHLB/Standard Method  
Version 1.2, 2017.

**END DETAIL**  
Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

**SEISMIC CATEGORY**  
A, B, C, D, E, F

**WARRANTY**  
10-year Limited Suspension Systems  
warranty increases to 15 years when  
installed with CertainTeed Ceiling Panels.  
Full warranty information can be found  
at [certainteed.com/warranty](http://certainteed.com/warranty).

## SEISMIC PERFORMANCE

**MAIN RUNNERS:**  
All main runners

**MINIMUM LBS. TO PULLOUT  
COMPRESSION/TENSION:**  
180 lbs.

**CROSS TEES:**  
All cross tees

## ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com/architectural](http://certainteed.com/architectural) for current reports.




# 15/16" EZ STAB CLASSIC ALUMINUM CAPPED SYSTEM

## VISUAL OPTIONS – SUSPENSION SYSTEMS


### ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.


#### CERTAINTEED STANDARD

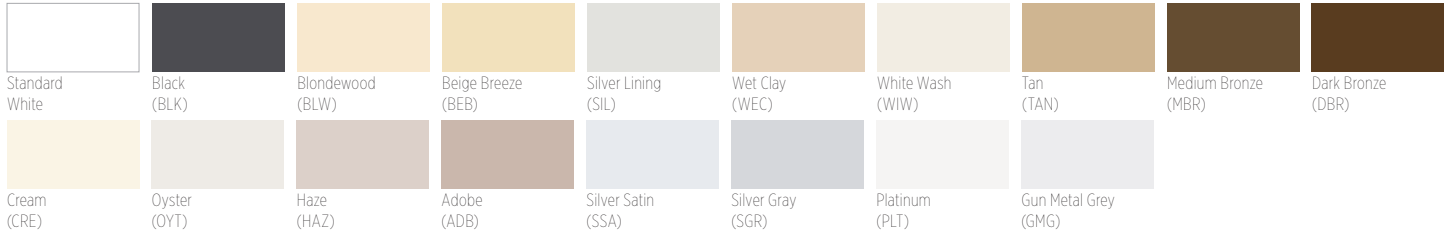

#### ECOPHON®

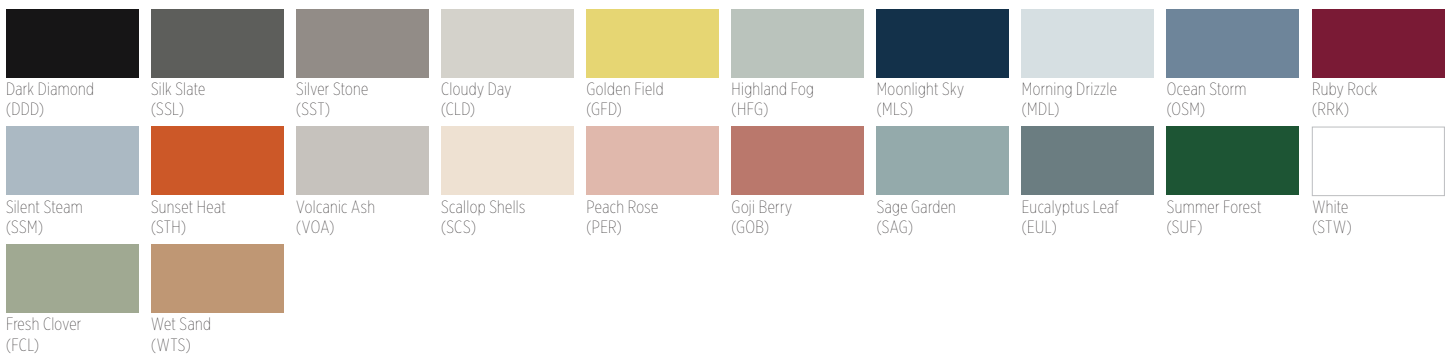

#### METAL CEILING




For Special color options, contact your local sales representative.

The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process preceding each catalog code:

Standard face paint: ST + 3-letter color code  
 Standard 360 paint: 3T + 3-letter color code  
 Special face page: SP + 3-letter color code  
 Special 360 paint: 3P + 3-letter color code

**Example:**  
 EZCS4-12-12 ST WEC

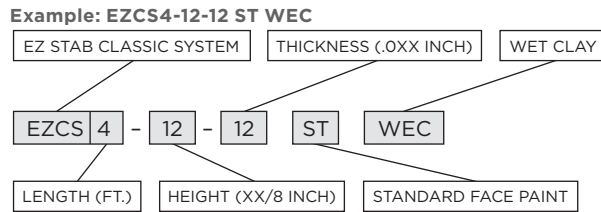

## CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
 20 Moores Road, Malvern, PA 19355 800-366-4327 [certainteed.com/architectural](http://certainteed.com/architectural)