



MAIN RUNNER



CROSS TEE

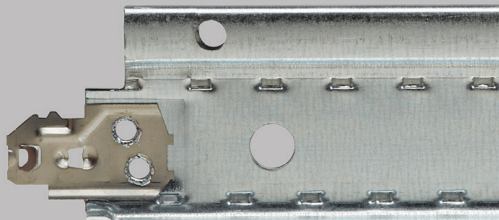

7/8" WALL ANGLE

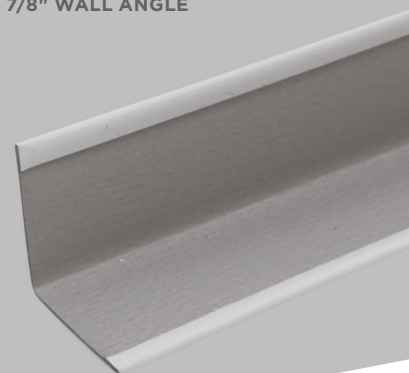


15/16" EZ Stab Classic All-Aluminum System

The EZ Stab Classic All-Aluminum System is ideal for non-ferrous applications and high-humidity environments.


Features & Benefits

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Enhanced stitching increases stiffness, reducing bending or twisting
- Roll-formed Aluminum profile offers superior protection from corrosive and/or high-humidity applications
- Non-ferrous construction enables use in MRI suites

Main Runner



Wall Angle



LEED® v4

RECYCLED CONTENT	up to 99%
✓	MR: PBT Source Reduction (Healthcare)
✓	MR: Material Ingredients (HPDs)
✓	EQ: Low-Emitting Material
✓	MR: Sourcing Raw Materials
✓	MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

DeclareSM
Living Building Challenge Red List Free®

15/16" EZ Stab Classic All-Aluminum System

	GRID FACE (IN.)	DESCRIPTION (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
Main Runners												
EZAL12-12-23	15/16	144 x 1-1/2 x 15/16	6 O.C.	20	240	A, B	LD	—	—	99%	6.86	18.9
Cross Tee												
EZAL2-12-23	15/16	24 x 1-1/2 x 15/16	—	60	120	—	—	—	—	99%	43.35	59.8
EZAL4-12-23	15/16	48 x 1-1/2 x 15/16	12 O.C.	60	240	—	—	—	—	99%	6.86	18.9
Wall Angle - Aluminum												
WA14-14SAL	7/8	144 x 7/8 x 7/8	—	40	480	—	—	9%	44%	53%	—	—
Flex Wall Angle												
FWA14-14	7/8	96 x 1-1/18 x 7/8	—	63	540	—	—	—	—	—	—	—
FWA14-9	9/16	96 x 1-1/18 x 9/16	—	63	540	—	—	—	—	—	—	—

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2. For each framing member, the allowable concentrated load must not be combined with the allowable uniform load.

Accessories

	ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/CARTON	LBS./CARTON
STANDARD	PAHD	Plastic Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	50	1
	SSHW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
	EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5

Physical Data

MATERIAL

Roll-formed Aluminum

SURFACE FINISH

Painted Aluminum Cap

END DETAIL

Main Runner: Integral Stab
Cross Tee: Staked-on Stab Clip

FACE DIMENSION

15/16"

PROFILE HEIGHT

1-1/2"

CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

WARRANTY

10-year Limited Suspension Systems warranty increases to 30 years when installed with CertainTeed ceiling panels. Full warranty information can be found at [certainteed.com/warranty](https://www.certainteed.com/warranty)

DUTY CLASSIFICATION

Light duty per ASTM C635

Mechanical Performance

MAIN RUNNER MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

CROSS TEE MINIMUM LBS. TO PULLOUT COMPRESSION/TENSION:

180 lbs.

*Requires the use of a single aluminum rivet through the cross tee clip



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](https://www.certainteed.com)