


9/16" EZ STAB ELITE NARROW SYSTEM

CEILINGS & WALLS ACOUSTICAL SUSPENSION SYSTEMS

MAIN RUNNER




CROSS TEE

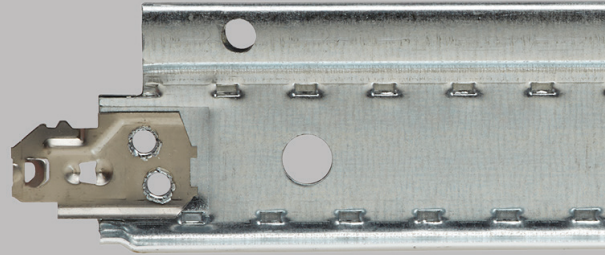

9/16" WALL ANGLE



7/8" WALL ANGLE




The slim face width complements modern design and offers flexibility and added strength.


FEATURES AND BENEFITS

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- Narrow style 9/16" (15 mm) face integrates with narrow reveal edge panels
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Centering tabs prevent gaps around the edge, enabling integration with trim edge panels
- Enhanced stitching increases stiffness, reducing bending or twisting
- Suitable for all seismic applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Intermediate- and heavy-duty load-bearing capabilities/classification
- Available in Standard White and Black. Additional color options are offered through our Post-Paint process. See the Visual Options - Suspension Systems page for color option details.


MAIN RUNNER

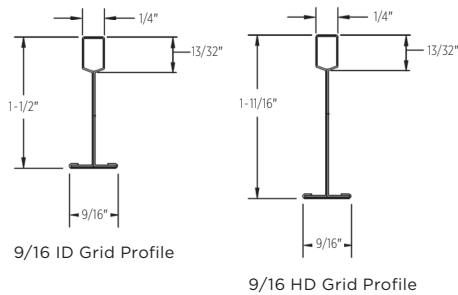

WALL ANGLE

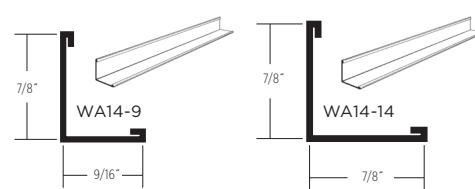

SHADOW MOLDING

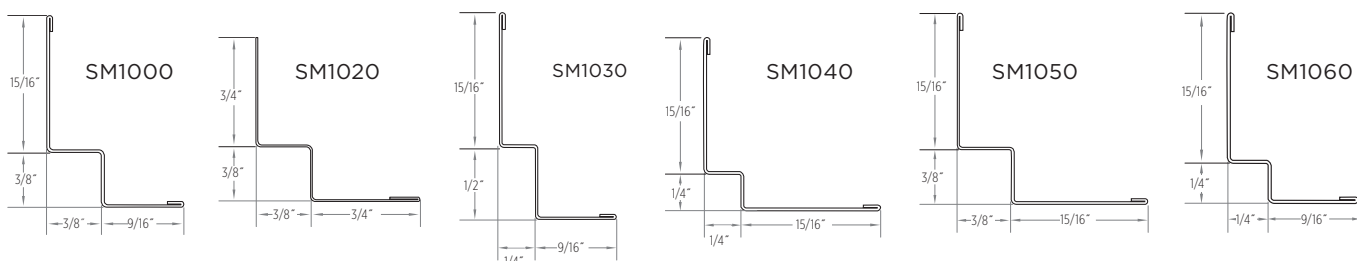

LEED® v4

RECYCLED CONTENT

up to 86%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declaration (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE

HPD AVAILABLE

DeclareSM
Living Building Challenge Red List Free[®]

ARCHITECTURAL

CertainTeed
SAINT-GOBAIN

9/16" EZ STAB ELITE NARROW SYSTEM

	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
MAIN RUNNERS												
EZES12-12-18	9/16	144 x 1-1/2 x 9/16	6 O.C.	20	240	A-C	ID	25%	35%	60%	13.15	32.88
EZES12-12-19	9/16	144 x 1-11/16 x 9/16	6 O.C.	20	240	A-F	HD	25%	34%	59%	17.97	44.93
CROSS TEE												
EZES0.33-12-12	9/16	4 x 1-1/2 x 9/16	—	60	20	—	—	25%	34%	39%	—	—
EZES0.5-12-12	9/16	6 x 1-1/2 x 9/16	—	60	30	—	—	25%	34%	39%	—	—
EZES1-12-12	9/16	12 x 1-1/2 x 9/16	—	60	60	—	—	25%	34%	59%	210.53	131.58
EZES2-12-12	9/16	24 x 1-1/2 x 9/16	—	60	120	—	—	24%	36%	60%	27.97	34.96
EZES2-12-19	9/16	24 x 1-11/16 x 9/16	—	60	120	—	HD	25%	34%	59%	50.00	62.50
EZES2.5-12-12	9/16	30 x 1-1/2 x 9/16	—	60	150	—	—	24%	36%	60%	—	—
EZES4-12-12	9/16	48 x 1-1/2 x 9/16	12 O.C.	60	240	—	—	24%	36%	60%	8.44	21.09
EZES4-12-19	9/16	48 x 1-11/16 x 9/16	12 O.C.	60	240	—	HD	25%	34%	59%	17.97	44.93
EZES5-12-12	9/16	60 x 1-1/2 x 9/16	12 O.C.	20	100	—	—	24%	36%	60%	4.44	13.88
EZES5-12-12-5s	9/16	60 x 1-1/2 x 9/16	6,20,30,40,54	20	100	—	—	24%	36%	60%	—	—
EZES6-12-12	9/16	72 x 1-1/2 x 9/16	12 O.C.	20	120	—	—	24%	36%	60%	2.76	10.35
EZES8-12-12	9/16	96 x 1-1/2 x 9/16	12 O.C.	20	160	—	—	24%	36%	60%	1.00	5.00
WALL ANGLE												
WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	19%	69%	88%	—	—
WA14-14	7/8	144 x 7/8 x 7/8	—	40	480	—	—	19%	69%	88%	—	—
WA14-14-10	7/8	120 x 7/8 x 7/8	—	40	400	—	—	19%	69%	88%	—	—
WA32-32	2	120 x 2 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-32-12	2	144 x 2 x 2	—	20	240	—	—	19%	69%	88%	—	—
WA32-15	2	120 x 2 x 15/16	—	20	200	—	—	19%	69%	88%	—	—
WA32-15-12	2	144 x 2 x 15/16	—	20	240	—	—	19%	69%	88%	—	—
FLEXIBLE WALL ANGLE*												
FWA14-9	9/16	96 x 1-1/8 x 9/16	—	63	504	—	—	19%	69%	88%	—	—
FWA14-14	7/8	96 x 1-1/8 x 7/8	—	63	504	—	—	19%	69%	88%	—	—

*Flexible Wall Angle is made of Rigid PVC

SHADOW MOLDING												
SM1000	—	120 x 15/16 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
SM1020†	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
SM1030	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
SM1040	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1050	—	120 x 2 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1060	—	144 x 2 x 15/16	—	40	400	—	—	9%	44%	53%	—	—

	GRID FACE (mm)	DIMENSIONS (mm)	SLOT SPACING (mm)	PIECES/CARTON	M/CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
MAIN RUNNER METRIC												
EZES3600M-12-18	14	3600 x 38 x 14	150	20	72	—	ID	25%	35%	60%	13.15	32.88
CROSS TEE METRIC												
EZES1200M-12-12	14	1200 x 38 x 14	300	60	72	—	ID	25%	35%	60%	8.66	21.31
EZES600M-12-12	14	600 x 38 x 14	0	60	36	—	ID	25%	35%	60%	29.68	36.51

†SM1020 is not hemmed along 3/4" side

*Maximum recycled content percentage. Recycled content varies by manufacturing location.

**Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2.

For each framing member, the allowable concentrated load must not be combined with the allowable uniform load. To specify Main Runners, Cross Tees, Wall Angles or Shadow Molding in black, order by item number followed by BLK. Example EZES12-12-18 BLK
Flex Wall Angle will fit a 5-1/2" radius or larger










MAXIMUM FIXTURE WEIGHT

ITEM NUMBER	CONFIGURATION		FIXTURE		HANGER SPACING		MAXIMUM WEIGHT	
	A	B	A	B	A	B	A	B
Main Runner to Main Runner – Drawing Key: Main Runner (I) Cross tee (---) Hanger wire (+)								
EZES4-12-12			24" x 48"	24" x 48"	48"	48"	41.00 lbs.	32.00 lbs.
EZES4-12-19			24" x 48"	24" x 48"	48"	48"	56.00 lbs.	56.00 lbs.
EZES4-12-12			24" x 48"	24" x 48"	48"	48"	41.00 lbs.	32.00 lbs.
EZES4-12-19			24" x 48"	24" x 48"	48"	48"	56.00 lbs.	56.00 lbs.
EZES4-12-12			24" x 24"	24" x 24"	48"	48"	26.00 lbs.	26.00 lbs.
EZES4-12-19			24" x 24"	24" x 24"	48"	48"	53.50 lbs.	56.00 lbs.

Cross tees tested as follows: EZES4-12-12 tested at 8.44 lbs/LF to 1/360 of 4' span; EZES4-12-19 tested at 17.97 lbs/LF to 1/360 of 4' span.



ACCESSORIES

		ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/ CARTON	LBS./ CARTON
SEISMIC		SLEEVE916	9/16" Sleeve	4 x 9/16 x 1/64 (102 x 15 x 1)	White	100	1
		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
STANDARD		AHD	Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	1000	16
		HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9
		IC-9	9/16" Inside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10
		OC-9	9/16" Outside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10

PHYSICAL DATA

CROSS TEE/MAIN RUNNER MATERIAL
Hot dipped galvanized steel (G30)

FACE DIMENSION
9/16"

CROSS TEE/MAIN RUNNER INTERFACE
Stepped-end/Override

LOAD CLASSIFICATION
Heavy duty and Intermediate duty
per ASTM C635

**CROSS TEE/MAIN RUNNER
SURFACE FINISH**
Painted Steel Cap

PROFILE HEIGHT
ID: 1-1/2"
HD: 1-11/16"

VOC EMISSIONS
Independently certified compliant with
California Department of Public Health
CDPH/EHLB/Standard Method
Version 1.2, 2017.

END DETAIL
Main Runner: Integral Stab
Cross Tee: Staked-on Stab Clip

SEISMIC CATEGORY
A, B, C, D, E, F

WARRANTY
10-year Limited Suspension Systems
warranty increases to 15 years when
installed with CertainTeed Ceiling Panels.
Full warranty information can be found
at certainteed.com/warranty.

SEISMIC PERFORMANCE

MAIN RUNNERS:
All main runners

**MINIMUM LBS. TO PULLOUT
COMPRESSION/TENSION:**
180 lbs.

CROSS TEES:
All cross tees

ICC EVALUATION SERVICE, INC., REPORT COMPLIANCE

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to certainteed.com/architectural for current reports.




9/16" EZ STAB ELITE NARROW SYSTEM

VISUAL OPTIONS – SUSPENSION SYSTEMS


ACOUSTICAL AND DRYWALL SUSPENSION SYSTEMS AND TERMINUS TRIM

Our newly expanded post-paint process allows for any CertainTeed Suspension System product to be painted in a variety of new colors, matching all CertainTeed colors along with any Sherwin-Williams® colors requested by the customer. We can also match any color if a color sample is provided.

CERTAINTEED STANDARD

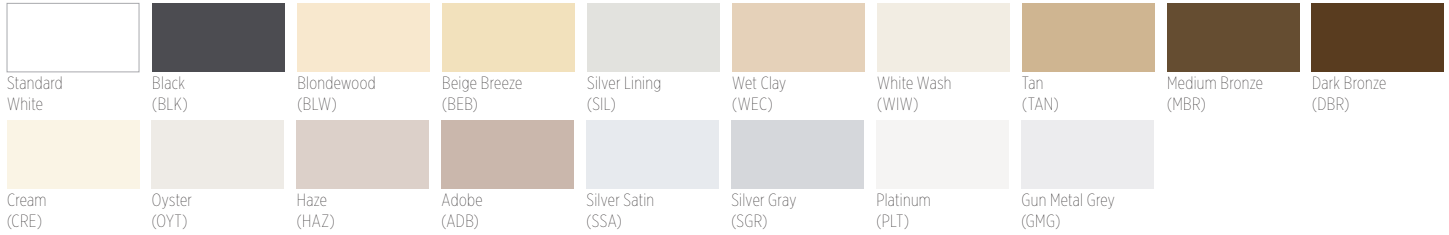

ECOPHON®

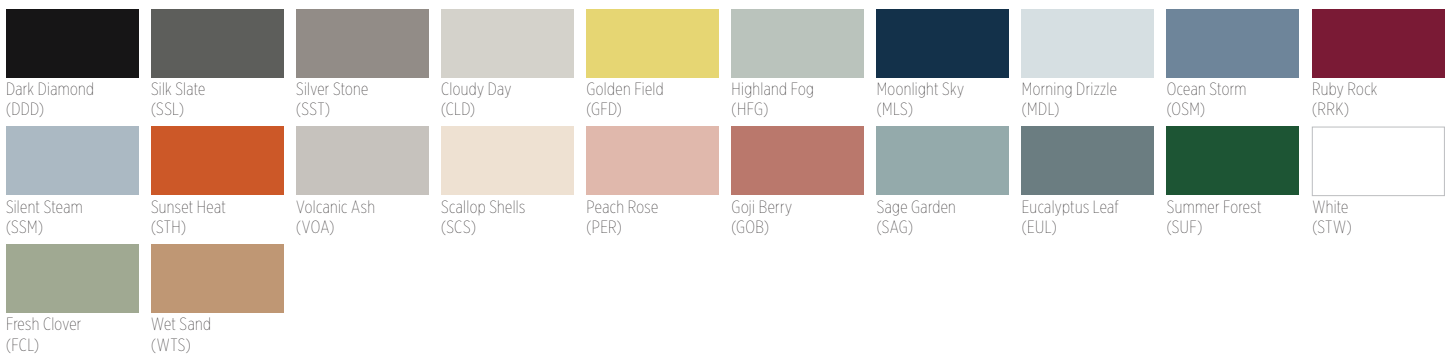

METAL CEILINGS



For Special color options, contact your local sales representative.


The colors shown have been reproduced with all the fidelity possible with commercial printing processes. Also, a specific color may appear different on one class of product than another.

When placing an order for either Standard or Special colors, please use the following naming process preceding each catalog code:

Standard face paint: ST + 3-letter color code
 Standard 360 paint: 3T + 3-letter color code
 Special face page: SP + 3-letter color code
 Special 360 paint: 3P + 3-letter color code

Example:
EZCS4-12-12 ST WEC

Example: EZCS4-12-12 ST WEC

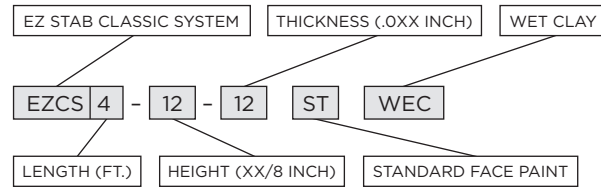

CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
 20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural