

Non-directional, sound-absorbing and sound blocking utilitarian panel offering exceptional value.

FEATURES AND BENEFITS

- Non-directional fissured pattern
- Three-dimensional face scoring available in 3 geometric designs with Customline options
- Environmental Product Declaration (EPD) available for this product
- Available in (Protectone) version suited for UL fire assemblies
- Health Product Declaration (HPD) available for this product

ATTRIBUTES



LR 0.83



EMISSION
COMPLIANT
CERTIFIED



RECYCLED
CONTENT
33-44%



BIOSHIELD®
MOLD/MILDEW
RESISTANT
(CUSTOMLINE ONLY)

LEED® v4

RECYCLED CONTENT		
CLASS A PROTECTONE®	33%	
	PRE: 28%	POST: 5%
CLASS A PROTECTONE®	44%	
	PRE: 42%	POST: 2%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS




EPD AVAILABLE




HPD AVAILABLE

EDGE DETAILS

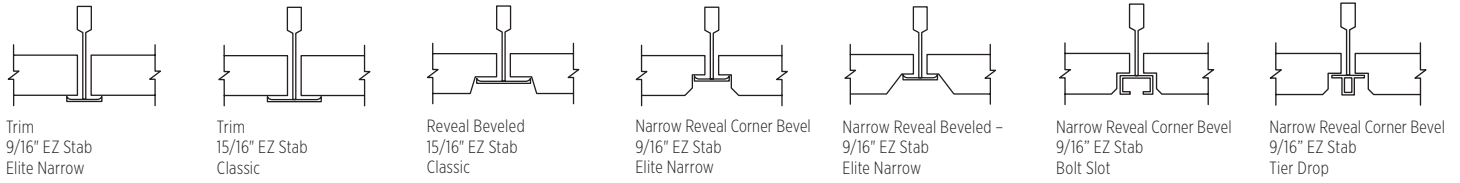

CUSTOMLINE SCORING OPTIONS

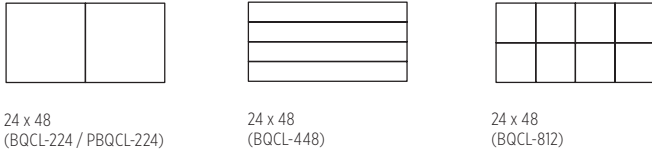

24 x 48
(BQCL-224 / PBQCL-224)

24 x 48
(BQCL-448)

24 x 48
(BQCL-812)

BAROQUE		FORMAT	DIMENSIONS (IN)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. M/CARTON	LBS./CARTON	CARTONS/PALLET	
TRIM												
	NRC .55	BET-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	16	64	45	20
		PBT-157	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	16	64	70	20
		BET-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	8	64	45	20
		PBT-197	Panels	24 x 48 x 5/8	0.55	40	44%	Yes*	8	64	70	20
		BET-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	8	67	52	20
REVEAL												
	NRC .55	BET-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	16	64	45	20
		PBT-154	Panels	24 x 24 x 5/8	0.55	35	44%	Yes*	16	64	70	20
		BET-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	8	64	45	20
NARROW REVEAL												
	NRC .55	BET-150	Panels	24 x 24 x 5/8	0.55	33	33%	—	16	64	46	20
BAROQUE METRIC		FORMAT	DIMENSIONS (MM)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. M/CARTON	LBS./CARTON	CARTONS/PALLET	
METRIC TRIM												
	NRC .55	BET-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	8	6	52	20
BAROQUE CUSTOMLINE		FORMAT	DIMENSIONS (IN)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	PIECES/CARTON	SQ. M/CARTON	LBS./CARTON	CARTONS/PALLET	
REVEAL												
	NRC .55	BQCL-224	Panels	24 x 48 x 3/4	0.55	35	33%	—	8	64	55	16
		BQCL-448	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
	NRC .50	BQCL-812	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
		PBQCL-224	Panels	24 x 48 x 3/4	0.50	40	44%	Yes*	8	64	75	16
NARROW REVEAL												
	NRC .55	BQCLN-224	Panels	24 x 48 x 3/4	0.55	35	33%	—	8	64	55	16
		BQCLN-448	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16
	NRC .50	BQCLN-812	Panels	24 x 48 x 3/4	0.50	35	33%	—	8	64	55	16

* Protectone®: A fire-resistive ceiling when used in applicable UL/ULC assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990



PHYSICAL DATA

MATERIAL

Mineral Fiber

FIRE CLASS (ASTM E1264)

All are Class A per ASTM E84 & CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C D - Baroque

Type III, Form 2, Pattern C D K - Customline

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance (Customline only).

BAROQUE CUSTOMLINE WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed suspension systems. Full warranty information can be found at certainteed.com/warranty.

BAROQUE WARRANTY

1-year Limited Warranty



CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS
20 Moores Road, Malvern, PA 19355 800-366-4327 certainteed.com/architectural

