

# Fine Fissured Fine Fissured High NRC Fine Fissured Customline®

## MINERAL FIBER FISSURED PANEL

A non-directional mineral fiber panel for all-around workability, affordability and great-looking installations.

### Features & Benefits

- Non-directional fissured pattern
- High NRC panels comply with LEED v4 for School classroom acoustics prerequisite
- Customline options provide three dramatic geometric designs with discreet small-scale fissure pattern
- High humidity and sag resistant
- Fine Fissured & Fine Fissured Customline has USDA Certified Biobased content at 96%
- Fine Fissured High NRC has USDA Certified Biobased content at 98%
- 30-Year System Warranty when installed with CertainTeed suspension systems
- Available in 6 standard colors for item numbers HHF-154, HHF-157, HHF-197, FFCL-224

### Attributes



NRC  
UP TO 0.75



SAG RESISTANT



BIOSHIELD®  
MOLD/MILDEW  
RESISTANT



EMISSION  
COMPLIANT  
CERTIFIED



LR 0.83/0.84

### CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE



**Declare**™

Living Building Challenge Red List Free®

Declare™ is a service mark of The International Living Future Institute.

## LEED® v4


RECYCLED CONTENT		
FINE FISSURED	33%	
	PRE: 28%	POST: 5%
PROTECTONE	44%	
	PRE: 42%	POST: 2%
FINE FISSURED HIGH NRC	70%	
	PRE: 68%	POST: 2%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning


LEED® is a registered trademark of the U.S. Green Building Council.

# Fine Fissured, Fine Fissured High NRC, Fine Fissured Customline®



## MINERAL FIBER FISSURED PANEL






### Customline Scoring Options




### Fine Fissured High NRC

Fine Fissured High NRC			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
Trim													
	NRC .75	HHF-457 HNRC	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-497 HNRC	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16
Reveal													
	NRC .75	HHF-454 HNRC	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-494 HNRC	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16

### Fine Fissured

Fine Fissured			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
Trim													
	NRC .55	HHF-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	50	20
		PFF-157	Panels	24 x 24 x 5/8	0.55	35	44%	YES*	0.84	16	64	70	20
		HHF-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20
		PFF-197	Panels	24 x 48x 5/8	0.55	40	44%	YES*	0.84	8	64	70	20
		HHF-177	Panels	24 x 60 x 5/8	0.55	35	33%	—	0.84	8	80	51	20
		HHF-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	0.84	8	66.7	52	16
Reveal													
	NRC .55	HHF-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	45	20
		PFF-154	Panels	24 x 24 x 5/8	0.55	35	44%	YES*	0.84	16	64	70	20
		HHF-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20
Narrow Reveal													
	NRC .55	HHF-150	Panels	24 x 24 x 5/8	0.55	35	33%	—	0.84	16	64	45	20

### Fine Fissured Metric

Fine Fissured Metric		FORMAT	DIMENSIONS (MM)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET	
Metric Trim													
	NRC .55	HHF-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	0.84	8	6	52	20

\* Protectone®: A fire-resistive ceiling when used in applicable UL/ULC assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.



To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW.

Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

# Fine Fissured, Fine Fissured High NRC, Fine Fissured Customline®


## MINERAL FIBER FISSURED PANEL

Fine Fissured Customline			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/ CARTON	SQ. FT./ CARTON	LBS./ CARTON	CARTONS/ PALLET
Reveal													
	NRC .55	FFCL-224	Panels	24 x 48 x 3/4	0.55	38	33%	—	0.84	8	64	64	16
	NRC .50	FFCL-448	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	60	16
		FFCL-812	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	64	16
		PFFCL-224	Panels	24 x 48 x 3/4	0.50	40	33%	YES*	0.84	8	64	75	16
Narrow Reveal													
	NRC .55	FFCLN-224	Panels	24 x 48 x 3/4	0.55	38	33%	—	0.84	8	64	64	16
	NRC .50	FFCLN-448	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	60	16
		FFCLN-812	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	64	16

\* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.  
To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze - BEB, Blondewood - BLW, Silver Lining - SIL, Wet Clay - WEC, White Wash - WIW.  
Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

### Edge Details

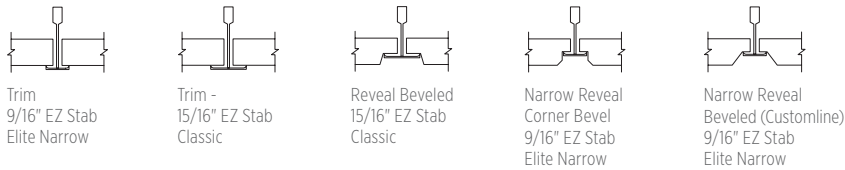

Color-coordinated suspension systems available



## Physical Data

### MATERIAL

Mineral Fiber

### FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

### ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type III, Form 2, Pattern D

ASTM E1264-23: Type A, From A1.2, Pattern D

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

### INSTALLATION CONSIDERATION

Customline & Colors Note: Product is lot sensitive. Differing manufacturing dates should not be mixed in a single ceiling or unbroken area.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

### WARRANTY

10-year 104/90 Limited Warranty increases to 30 years when installed with CertainTeed suspension systems. Full warranty information can be found at [certainteed.com/warranty](https://certainteed.com/warranty)



## CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](https://certainteed.com)