

FLINTFAST® FM-290

BASE SHEET ATTACHMENT TO LIGHTWEIGHT INSULATING CONCRETE

Description

Two-legged fastener for attachment of base sheet to lightweight, insulating concrete roofdecks. Designed specifically for applications that require maximum withdrawal resistance.

Composition

Fastener: Precision formed from polymer-coated steel to prevent corrosion; 2.4" x 1.3" rectangular rib reinforced head; two rectangular dual gripping legs, 1.7" long.

Disk: Precision formed from coated steel to prevent corrosion; rib reinforced cap, 3.6" x 2.5".

Technical Data

Approvals: FM-290 fasteners maintain Factory Mutual, Underwriters Lab, and Miami-Dade County Approvals.

Fastening Pattern: Consult Factory Mutual, Underwriters Lab or Miami-Dade requirements for recommended pattern in normal, exposed and hurricane areas.

Field Testing: On-site withdrawal testing should always be performed to evaluate the ability of the roofing substrate to satisfactorily accept and retain fasteners. Such testing may alter fastener selection and modify applicable fastening patterns.

Installation




Equipment: Always use the 290 Driver to assure proper fastener installation.

Method: Drive FM-290 as an ordinary nail. DO NOT TOE. Seat disk flush with roofing surface.

Operation: As FM-290 is driven, dual legs diverge to cut plugs of deck material, and wedge and anchor the FM-290 in its own hole. No pre-drilling is required.

Packaging: 500 FM-290 fasteners per carton. Gross weight: 35lbs. Shrink wrapped and palletized.

Elastomeric polymer coating protects exposed surfaces of fastener from corrosion. Use only approved base sheet materials. Fastener anchors itself in its own hole by cutting an inverted wedge of concrete. No pre-drilling required.

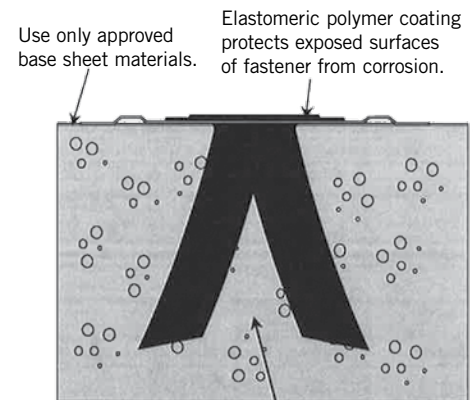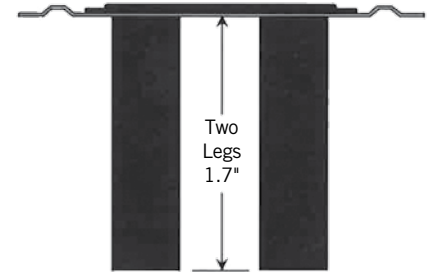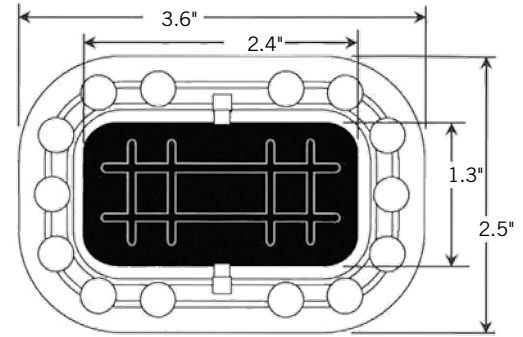

Fastener anchors itself in its own hole by cutting an inverted wedge of concrete. No pre-drilling required.

Using The FM-290

Fastener density and spacing vary depending on applicable uplift requirements. Local codes, governing approval bodies, membrane manufacturers, and individual roofdeck manufacturers all may have specific requirements that need to be addressed prior to beginning any roofing project. The following illustrates a typical Factory Mutual Approved fastening pattern widely accepted for use by membrane and roofdeck manufacturers.

Fastening Guide Class 1-90 Windstorm Classification

An FMRC-approved base sheet is secured to an FMRC-approved lightweight, insulation concrete roofdeck as outlined in the current edition of the FMRC Approval Guide and/or RoofNav.



The base sheet is secured in the field of the roof with FM-290 fasteners installed 9" on center in the side laps and 12" on center in two staggered rows between the side laps.

When fastening meter-wide material with this pattern, expect to use approximately 113 fasteners per square (100 ft²).

Important:

Prior to roofing, on-site withdrawal testing should always be performed to evaluate the ability of the roofing substrate to satisfactorily accept and retain fasteners. Such testing may alter fastening selection and modify applicable fastening patterns.

For more information, contact CertainTeed Commercial Roofing Technical Services at 800-396-8134 x2.

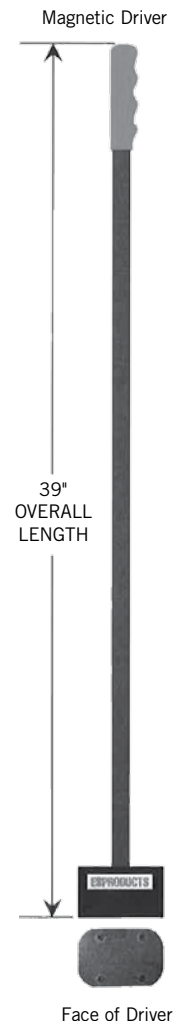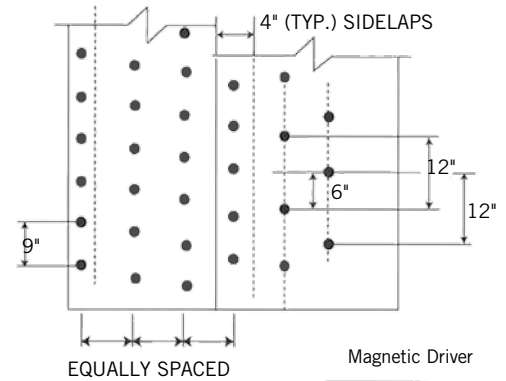

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE
GYPSUM • CEILINGS • INSULATION

www.certainteed.com <http://blog.certainteed.com>

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777

© 03/15 CertainTeed Corporation, Printed in the U.S.A.
Code No. COMM-316