



Flintlastic® SA

Self-Adhered Modified Bitumen Roof System

Flintlastic SA delivers the reliable protection of traditional modified bitumen roofing for a fraction of the labor, plus:

- No kettle, fumes, or burn risk
- No torch or risk of fire
- Reduced training requirement
- No building occupant disturbance
- No mess or side lap bleed out
- Reduced insurance requirement
- Superior waterproofing under clay/concrete tile compared to other underlayment options

Meet the family

Select the Flintlastic SA base, interply (optional) and cap sheet combination that meets your building, performance and warranty needs:

Flintlastic SA NailBase

Nailable base sheet for plywood/OSB or lightweight insulating concrete

Flintlastic SA PlyBase

Self-adhered base ply or interply

Flintlastic SA MidPly

Premium self-adhered base ply or interply, for extended warranties

Flintlastic SA Cap

Workhorse cap sheet

Flintlastic SA Cap FR**

Fire and impact resistant cap sheet




**UL 2218 Class 4 Impact Resistance – Certain systems are UL classified as to impact resistance as described in the UL Roofing Materials and Systems Directory.

Aesthetic Selection

Flintlastic SA Cap is available in twelve colors designed and engineered to match our most popular shingle blends or clay/concrete tile¹:



Buff¹

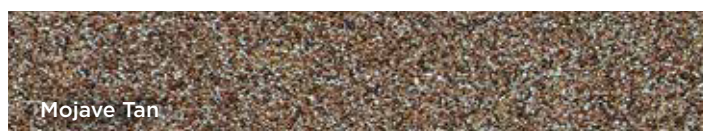


Mojave Tan




Burnt Sienna¹



Resawn Shake

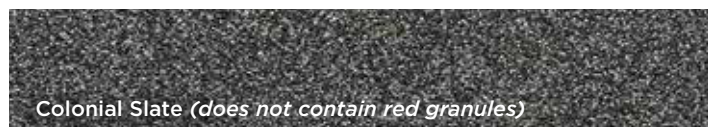

Colonial Slate *(does not contain red granules)*

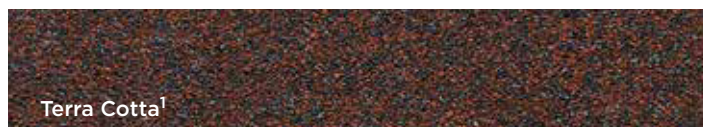

Terra Cotta¹




CoolStar




Weathered Wood



Evergreen

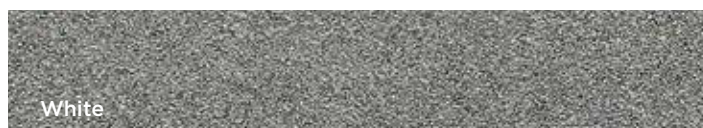

White

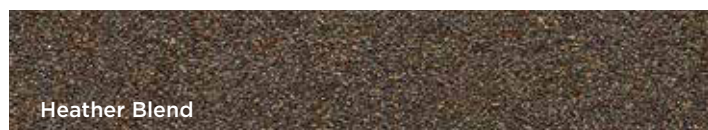

Heather Blend



Moiré Black

Joe Knows
Flintlastic SA
Accessories —
do you?

Colors shown in samples and marketing literature may be slightly different than the installed product. Granule blends may vary slightly from one production run to the next but are often undistinguishable upon installation.



^{**}UL 2218 Class 4 Impact Resistance – Certain systems are UL classified as to impact resistance as described in the UL Roofing Materials and Systems Directory.

Popular Systems

MF = Mechanically Fastened, SA = Self-Adhered

| Warranty Duration | Insulation/Coverboard | Base | Cap (SA) |
|-------------------|---------------------------------|------------------------------|--|
| 12 Years | Optional | SA NailBase (MF) | SA Cap/SA Cap (FR ^{**}) |
| 15 Years | Optional | SA PlyBase ² (SA) | |
| 20 Years | Optional | SA MidPly ² (SA) | SA Cap CoolStar®/ SA Cap (FR ^{**}) CoolStar |
| 25 Years | Double layer, 2nd layer adhered | SA MidPly (SA) | |

² Wood deck? CertainTeed recommends the use of Flintlastic SA NailBase as a base sheet and SA PlyBase or SA MidPly as interplies, however, when self-adhering a base layer over wood decks, priming is recommended; self-adhering over wood decks is not permitted by code in Miami-Dade County; check your local building code; at the end of the roofing membrane's life, roofing membranes self-adhered over wood decks will require replacement of the deck; self-adhering to resinous wood, such as pine, is prohibited; roof systems with base sheets self-adhered directly to wood roof decks qualify for Integrity Roof System Limited Warranties only; Integrity Roof System NDL Limited Warranties and Sure Start™ Plus 5-STAR Warranties require the use of Flintlastic SA NailBase as a base sheet.



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM

20 Moores Road, Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com

©07/24 CertainTeed, Printed in the USA, Code No. 00-04-Z29-NA-EN