

# GlasRoc<sup>®</sup> SHAFTLINER

## GLASS MAT TYPE X DRYWALL PANEL

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

Products Specified \_\_\_\_\_

### PRODUCT DESCRIPTION

GlasRoc<sup>®</sup> Shaftliner for use in Shaftwall and Area Separation Firewall Systems is a 1" (25.4 mm) thick drywall panel with a specially formulated fire resistive, non-combustible, and moisture resistant gypsum core. It is faced with reinforcing glass mats and a weather-resistive coating on the surface.

GlasRoc Shaftliner is designed and engineered for use in constructing lightweight Shaftwall and Area Separation Firewall assemblies. GlasRoc Shaftliner is UL/cUL Classified and ULC Listed in fire resistance designs and features double beveled edges for easy installation.

In addition to its fire resistive properties, GlasRoc Shaftliner is also designed and engineered to provide added protection against mold. When tested for mold resistance by an independent lab, GlasRoc Shaftliner achieved the highest possible score of 10 per ASTM D3273.

### BASIC USES

GlasRoc Shaftliner is used in conjunction with other CertainTeed gypsum board products in Shaftwall and Area Separation Firewalls.

Gypsum shaftwall systems can replace traditional masonry for interior vertical enclosures including stairwells, elevator enclosures and mechanical chases. Some inherent advantages of gypsum shaftwall systems are: one-sided construction, lighter weight, reduced thickness, ease and speed of installation, and no requirement for scaffolding.


GlasRoc Shaftliner can also be used in Horizontal Systems for membrane and duct protection and corridor ceilings. UL/cUL I515, provides a 1-hour and 2-hour fire resistance rated assembly.

GlasRoc Shaftliner for use in Shaftwall Systems provides one to four hour fire resistive ratings, in non-loadbearing configurations. UL/cUL U417 or ULC W446, provides a 1-hour, 2-hour, or 3-hour fire resistance rated assembly. UL/cUL W471 provides a 4-hour fire resistance rated assembly. The systems are designed to withstand the intermittent surges of air pressure caused by fast moving elevator cabs.

CertainTeed Area Separation Firewalls offer the advantages of fire resistance and noise attenuation between adjoining housing units. These walls offer 2-hour or 3-hour fire resistance rating line of defense between units and provide acoustical ratings up to an STC 73. UL/cUL U366 or ULC W311, provides a 2-hour resistance rated assembly. UL/cUL W467 provides a 3-hour fire resistance rated assembly.

### ADVANTAGES

- Area Separation Firewalls and Shaftwall Systems.
- 12 month limited warranty against exposure.
- Resists mold growth per ASTM D3273.
- Economical and efficient installation.
- Provides acoustical ratings up to an STC 73.
- Scores and snaps easily with no special handling required.
- No requirement for additional trades people on job.
- Added protection from moisture during construction.
- UL/cUL Classified and ULC Listed for Fire Resistance.
- One-sided construction of shaftwalls eliminates the need for extensive scaffolding.
- Rapid ease of installation reduces overall construction time and provides a cost effective system.
- Lightweight construction.
- Reduced wall thickness means greater floor area.
- GREENGUARD<sup>®</sup> Gold Certified.

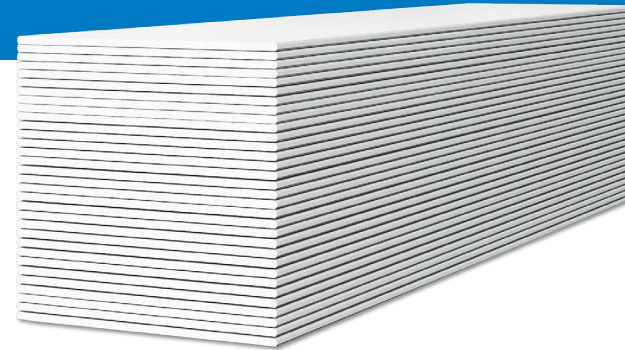

### PRODUCT DATA

PROPERTIES	GLASROC SHAFTLINER TYPE X DRYWALL PANEL
Thickness	1" (25.4 mm)
Width	2' (610 mm)
Length	8', 10', 12' (2440, 3050, 3660 mm)
Weight	4.0 lb/ft <sup>2</sup> (19.5 kg/m <sup>2</sup> )
Edges	Double beveled
Packaging	Per piece

Custom lengths may be available on special order. Consult your CertainTeed sales representative.

### TECHNICAL DATA

APPLICABLE STANDARDS AND REFERENCE	
Product Standard	ASTM C1658
Installation Guidelines	ASTM C840 / GA-216
Finishing Guidelines	ASTM C840 / GA-214
Code References	International Building Code (IBC)
Code References	International Residential Code (IRC)
Code References	National Building Code of Canada (NBCC)
UL/ULC Designation	LGFCSL

PHYSICAL PROPERTIES	1" (25.4 MM) GLASROC® SHAFTLINER	TEST METHOD
Nominal Width	2' (1220 mm)	-
Standard Lengths	8' (2440 mm), 10' (3050 mm), 12' (3660 mm)	-
Face Surface	Glass Mat	-
Weight - lb/ft <sup>2</sup> (kg/m <sup>2</sup> )	4.0 lb/ft <sup>2</sup> (19.5 kg/m <sup>2</sup> )	-
Edge Profile	Double Bevel	-
Surface Burning Characteristics - Flame Spread	0 (0)	ASTM E84 / UL 723 (CAN/ULC-S102)
Surface Burning Characteristics - Smoke Developed	0 (0)	ASTM E84 / UL 723 (CAN/ULC-S102)
Surface Burning Characteristics	Class A	ASTM E84 / UL 723 (CAN/ULC-S102)
Mold Resistance	10 out of 10	ASTM D3273
Water Resistance	≤ 10%	ASTM C473
Combustibility	Non-Combustible	ASTM E136 (CAN/ULC-S114)
Core Hardness - End	≥ 15 lbf (67 N)	ASTM C473 (Method B)
Core Hardness - Edge	≥ 15 lbf (67 N)	ASTM C473 (Method B)
Flexural Strength - Parallel	≥ 80 lbf (356 N)	ASTM C473 (Method B)
Flexural Strength - Perpendicular	≥ 230 lbf (1023 N)	ASTM C473 (Method B)

## INSTALLATION

### LIMITATIONS

- For non-loadbearing partitions only.
- Not recommended for continuous exposure to temperatures exceeding 125° F (52° C).
- Not designed to serve as an unlined air supply duct.
- Panels should not come in direct contact with concrete, masonry or other surfaces that have high moisture content.
- Panels should be stacked flat on a smooth, level surface, not directly on the ground during storage.
- Panels should always be kept dry prior to installation.
- Panels should be carried with care to place of installation to prevent damaging of finished edges.
- Limiting heights and deflection criteria for the system should be based upon the stud manufacturer's recommendations.
- 1 to 3-hour vertical shaftwall UL fire rated assembly UL/cUL U417 or ULC W446
- 4-hour vertical shaftwall UL fire rated assembly UL/cUL W471
- 1 or 2-hour horizontal shaftwall UL fire rated assembly UL/cUL I515

### AREA SEPARATION FIREWALLS

- The Area Separation Firewall is a non-loadbearing partition.
- Interior finish walls (protected walls) are loadbearing or non-loadbearing walls.
- Not recommended for continuous exposure to temperatures exceeding 125° F (52° C).
- Panels should be stacked flat on a smooth, level surface, not directly on the ground during storage.
- Panels should be carried with care to place of installation to prevent damaging of finished edges.
- Panels should always be kept dry prior to installation.
- Unsupported wall height between floors should not exceed 12 feet (3660 mm). The assembly may be used in buildings up to 4 stories with a total height not to exceed 70 feet (21336 mm).
- Penetrations are not permitted in the double layer 1" shaftliner wall, but are permitted in the protective flanking walls. Consult local building code authorities.
- 2-hour Area Separation Firewall Assembly - UL/cUL U366 or ULC W311
- 3-hour vertical shaftwall UL fire rated assembly - UL/cUL U467

### RECOMMENDATIONS

Installation of GlasRoc® Shaftliner panels should be consistent with methods described in the standards and references noted.

## BIM/CAD INFORMATION

The BIM and CAD UL fire rated assemblies and sound assemblies can be found on CertainTeed's BIM and CAD Design Studio at [bimlibrary.saint-gobain.com/certainteed](http://bimlibrary.saint-gobain.com/certainteed). CertainTeed's BIM and CAD Design Studio provides BIM and CAD details to many UL fire rated assemblies and sound assemblies in easy to view experience. Plus, downloadable Revit and DWG and PDF CAD Details are available.

## SUSTAINABILITY

Sustainable documentation, including recycled content, EPD's, HPD's, VOC Certifications, can be found at [saintgobain.ecomedes.com](http://saintgobain.ecomedes.com).

## NOTICE

The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

For Fire Resistance, no warranty is made other than conformance to the standard under which the assembly was tested. Minor discrepancies may exist in the values of ratings, attributable to changes in materials and standards, as well as differences between testing facilities. Assemblies are listed as "combustible" (wood framing) and "noncombustible" (concrete and/or steel construction).

USGBC® and the related logo are trademarks owned by the U.S. Green Building Council and are used with permission.



The Health Product Declaration\* logo is a trademark or service mark of Health Product Declaration Collaborative, Inc., in the United States and in other countries and is being used herein under license.



## CertainTeed

CEILINGS • DECKING • FENCE • GYPSUM • INSULATION • RAILING • ROOFING • SIDING • TRIM  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](http://certainteed.com)