



Gyptone® Big™

GYPSUM PERFORATED PANEL

Beautiful, innovative large-format perforated gypsum panels create unique spaces.

Features & Benefits

- Smooth, paintable surface simplifies installation and maintenance, ensuring long, sustainable life
- Screw attach to CertainTeed 1.5" Drywall Suspension System/metric dimension components
- Complementary Gyptone lay-in ceiling panels available for each pattern
- Designed with four tapered edges for easy finishing
- Suitable for wall and ceiling applications and can be shaped to min. 20-ft radius (dry bend)
- Proprietary Saint-Gobain formaldehyde scavenging performance (inherent to all Gyptone products)

Attributes



EMISSION
COMPLIANT
CERTIFIED



RECYCLED
CONTENT

LEED® v4

RECYCLED CONTENT

up to 85%

- ✓ EQ: Interior Lighting
- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials

LEED® is a registered trademark of the U.S. Green Building Council.

CERTIFICATIONS & PRODUCT DECLARATIONS



HPD AVAILABLE

Gyptone® Big™


GYPSUM PERFORATED PANEL

Gyptone® Big™	DIMENSIONS (IN.)	NRC*	CAC*	HOLE SIZE (MM)	PERFORATED AREA	RECYCLED CONTENT	MAX PIECES/PALLET	SQ. M (FT.)/PIECE	LBS./PALLET
Line 6									
5200605112	1200 x 2400 x 12.5 (≈47.2 x 94.5 x 1/2)	Ceiling: 0.60 Wall: 0.65 [†]	—	6 x 80	13%	85%	45	3 (31)	2286
Quattro 41									
5200605090	1200 x 2400 x 12.5 (≈47.2 x 94.5 x 1/2)	Ceiling: 0.70 Wall: 0.80 [†]	—	12x12	16%	85%	45	3 (31)	2286
Quattro 46									
5200640995	1200 x 2400 x 12.5 (≈47.2 x 94.5 x 1/2)	Ceiling: 0.60 Wall: 0.60 [†]	—	12x12	10%	85%	45	3 (31)	2286
Sixto 63									
5200545808	1200 x 2400 x 12.5 (≈47.2 x 94.5 x 1/2)	Ceiling: 0.65 Wall: 0.70 [†]	—	12D	15%	85%	45	3 (31)	2295
Sixto 65									
5200607125	900 x 2700 x 12.5 (≈35.4 x 106.3 x 1/2)	Ceiling: 0.75 Wall: 0.85 [†]	—	12D	17%	85%	45	3 (26.1)	1926

*NRC and CAC values when used with CertainTeed Sustainable Insulation in unfaced 2-1/2" (R-8) as an overlay above the installed panel (Without insulation NRC=0.70, CAC=17)

Accessories

GYPTONE BIG ACCESSORIES		PRODUCT NAME	PIECES/CARTON	USE
—	5200428567	Quattro 41 Access Panel	1	Access Panel for Quattro 41 Ceiling
—	5200428599	Line 6 Access Panel	1	Access Panel for Line 6 Ceiling
—	5200428548	Sixto 63 Access Panel	1	Access Panel for Sixto 63 Ceiling
—	5200428576	Quattro 46 Access Panel	1	Access Panel for Quattro 46 Ceiling
	5200412213	C-Channel	12	For use in framing the perimeter of the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application
	5200412216	Z-Channel	12	For use in framing horizontally across the wall structure in a Gyptone BIG or Gyptone BIG Curve wall application
	5200412717	QSTR 25 Screw	1000	For use when attaching Gyptone BIG boards to metal framing in perforated area

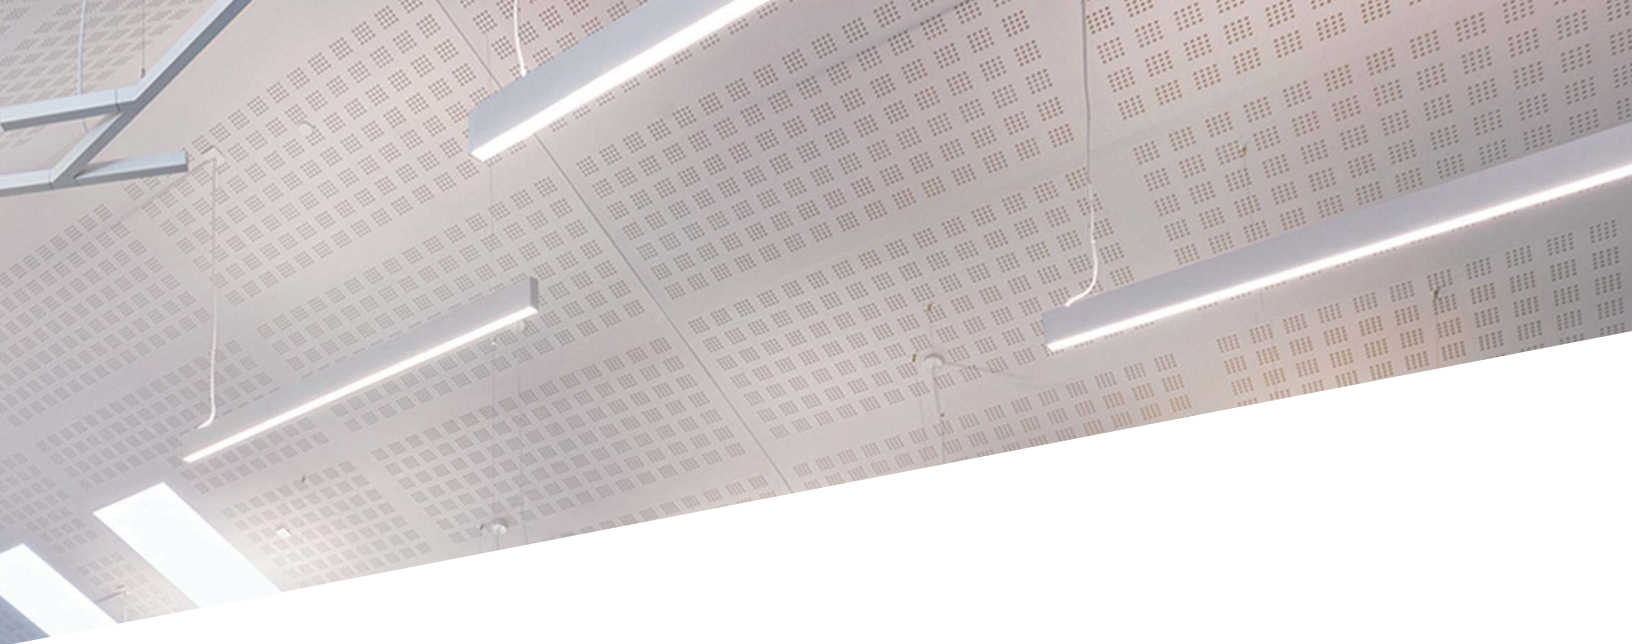

Line 6



Quattro 41



Quattro 46



Sixto 63



Sixto 65



Gyptone BIG access panels are quick to install and virtually invisible because the gap between the ceiling and the hatch is minimal. This fully integrated solution is available for most Gyptone BIG patterns and allows for easy access to the plenum. (Not available for Gyptone BIG Sixto 65)

Physical Data

MATERIAL

Gypsum

FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type XX, Pattern A G

ASTM E1264-23: Type G, Form G1, Pattern A G

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Painted surfaces can be cleaned with a damp cloth and mild detergent.



CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM
20 Moores Road, Malvern, PA 19355 800-233-8990 certainteed.com