SAND MICRO™ | SAND MICRO CUSTOMLINE®

Textured Mineral Fiber

A finely textured, durable, mineral fiber panel that appears smooth when installed.



FEATURES AND BENEFITS

- Lightly textured surface provides attractive finish with excellent light reflectance
- Customline scoring option gives the appearance of 2'x 2' reveal in a 2'x 4' panel
- Fine texture gives the appearance of a smooth finish when installed
- Non-directional visual

- High humidity and sag resistant
- Health Product Declaration (HPD) available for this product
- Environmental Product Declaration (EPD) available for this product

SUSPENSION SYSTEM OPTIONS



Narrow Reveal Corner Bevel 9/16 Grid Bolt Slot (Sand Micro)










CUSTOMLINE SCORING OPTIONS



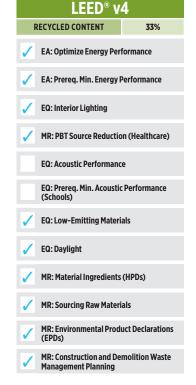









Customer Support | certainteed.com/ceilings | 800-233-8990

SAND MICRO™ | SAND MICRO CUSTOMLINE®

Textured Mineral Fiber

All products in this line feature these attributes:















33%

RI C	ECYCLE ONTEN	

SAND MICRO		Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	Pieces/ carton	Sq. Ft./ carton	Lbs./ carton	Cartons/ pallet
TRIM										
	SHM-157 SHM-197	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
	SHM-197	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20
REVEAL										
	SHM-154 SHM-194	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
	SHM-194	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20
NARROW REVEAL										
	SHM-150 SHM-190	Panels	24 x 24 x 5/8	0.50	33	33%	16	64	47	20
	SHM-190	Panels	24 x 48 x 5/8	0.50	35	33%	8	64	47	20
SAND MICRO CUSTOMLINE		Format	Dimensions (in.)	NRC (UL Classified)	CAC (UL Classified)	Recycled Content	Pieces/ carton	Sq. Ft./ carton	Lbs./ carton	Cartons/ pallet
REVEAL										
	SMCL-224	Panels	24 x 48 x 3/4	0.50	35	33%	8	64	62	16

0.50

24 x 48 x 3/4

Panels

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

SMCLN-224

PHYSICAL DATA

NARROW REVEAL

MATERIAL

Mineral Fiber

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C E

FIRE CLASS (ASTM E1264)

All are Class A per ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less **VOC EMISSIONS**

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield treatment included for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year 104/90 Limited Warranty increases to 15 years when installed with CertainTeed Suspension Systems. Full warranty information can be found at certainteed.com/ceilings.

