
TECHSTYLE® WHITE

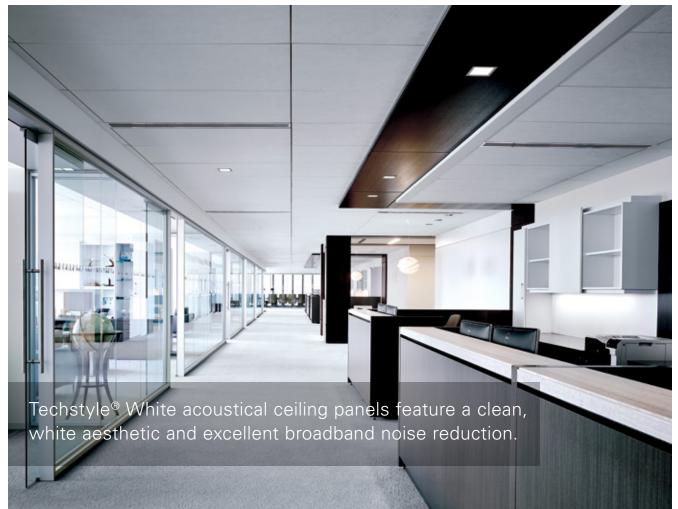

Project: Cheniere Energy Headquarters, Houston, TX; Techstyle® White Photo credit: Scott McDonald @ Gray City Studios

KEY FEATURES

- Proprietary formaldehyde-free fiberglass composite construction
- Monolithic appearance large format panels, semi-concealed suspension, nominal 1/4" reveals
- Convenient swing-down access to the plenum
- Trims are engineered for fast installation of Techstyle®
- Lighting and diffuser integration
- Enhanced soiling resistance and clean-ability
- Class A Fire Rating, per ASTM E84
- GREENGUARD Gold Certified

PHYSICAL DATA

Surface Finish: Acoustical Coating Light Reflectance: 81% (LR1) ASTM E1477 Surface Burning: Class A (ASTM E84)

Flame Spread Index < 10

- Smoke Index < 10

Acoustical Ratings – NRC: 0.85 (ASTM C 423)

Acoustical Ratings – CAC: 17 w/no backer, (ASTM E1414)

Moisture Resistance: Resistant to 95% humidity


in 104° temperature

Fungal Resistance: Resistant (ASTM C1338)

Weight: 0.30 lbs. per sq. ft. Warranty: 10 year limited ICC: Approval (ESR-2123)


REVIT files available for BIM contributions. see website for details.


TYPICAL ISOMETRIC

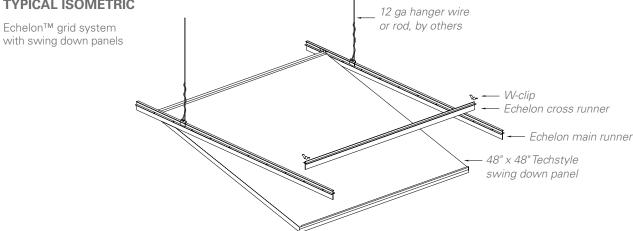

SUSPENSION SYSTEMS

Echelon: CertainTeed grid system Compatible with swing down and lay-in panels





15/16" T-Grid or 9/16" T-Grid

LAY-IN

Lay-in Panels

PANEL SIZES

Additional sizes available, consult manufacturer.

SWING-DOWN

Width x Length

24" x 6"	24" x 24"	24" x 42"	24" x 48"	24" x 54"	24" x 60"
24" x 66"	24" x 72"	24" x 78"	24" x 84"	24" × 90"	24" x 96"
30" x 6"	30" x 30"	30" x 60"	30" x 72"	30" x 96"	
48" x 6"	48" x 24"	48" x 42"	48" x 48"	48" x 54"	48" x 60"
48" x 66"	48" x 72"				

LAY-IN

Width x Length


24" × 6"	24" x 24"	24" x 42"	24" x 48"	24" x 54"	24" × 60"	24" x 66"
24" × 72"	24" x 78"	24" x 84"	24" × 90"	24" x 96"	24" × 120"	
30" x 6"	30" × 30"	30" × 60"	30" x 72"	30" x 96"		
48" x 6"	48" x 24"	48" x 42"	48" x 48"	48" x 54"	48" x 60"	48" x 66"
48" x 72"	48" x 96"					

TYPICAL SECTION - TRIMS

See Resource section for available trim options.

ACOUSTICS

Techstyle®'s honeycomb design absorbs both high and low frequencies at an impressive level, providing superior acoustical performance, no matter the frequency. NRC 0.85 (ASTM C 423) SAA 0.86 (ASTM C 423).

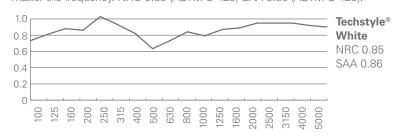

LEED V4 CREDITS

EA: Optimize Energy Performance MR: Building Product Disclosure

EQ: Low-Emitting Materials

EQ: Indoor Air Quality Assessment

EQ: Daylight

EQ: Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified

CTSpecialtyCeilings.com 185 184 CTSpecialtyCeilings.com | 800.366.4327 800.366.4327

TECHSTYLE® CEILINGS


TECHSTYLE® WHITE

COLOR OPTION


Available in white only. Color image is for illustration purposes only.



White

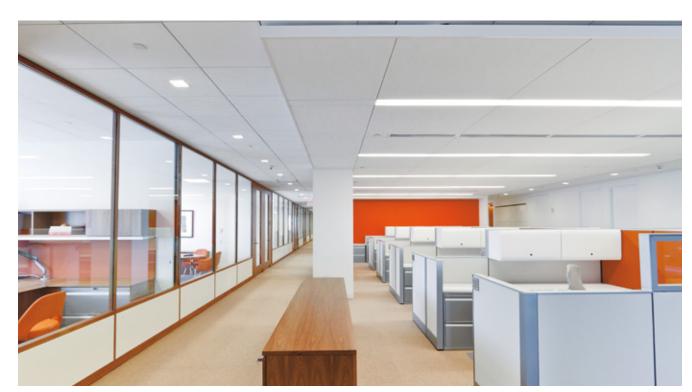

Project: Hunter Douglas Corporate Office, Pearl River, NY; Techstyle® White

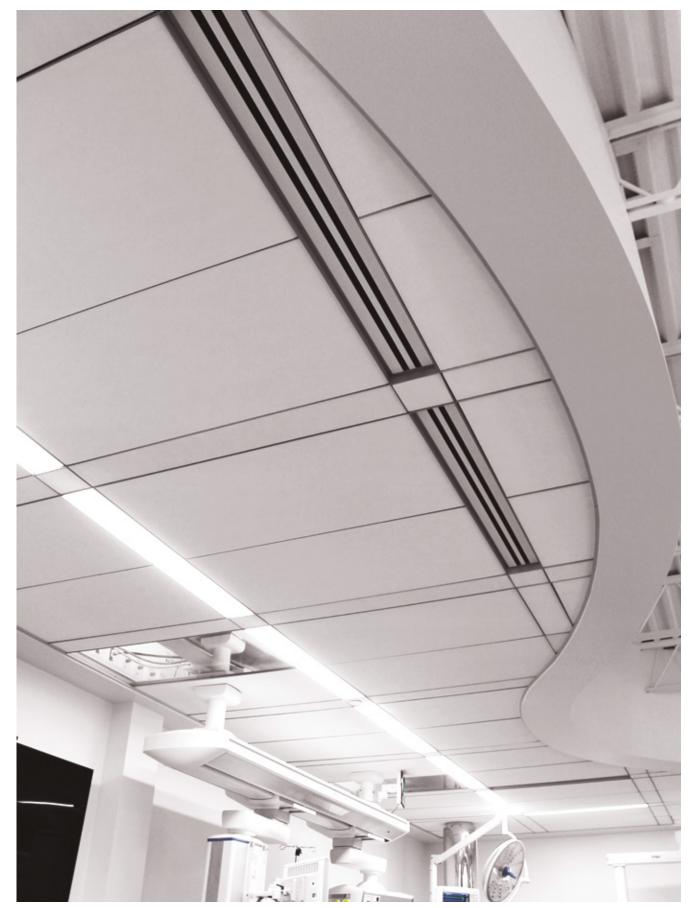

Project: Drager, Ontario, Canada; Techstyle® White with Echelon™ Photo credit: Krysta Mohammed

800.366.4327 | CTSpecialtyCeilings.com 187 186 CTSpecialtyCeilings.com | 800.366.4327