

#XJ15 Zinc Double-J Control Joint (ZJ15)

Corrosion resistant expanded flange control joint with a taped reveal

#XJ15 Expanded Flange Control Joint (Double-J) is used to relieve stresses in large plastered areas of walls, ceilings, and stucco areas when the highest degree of corrosion resistance is required. The Double-J has a taped, 5/16" reveal and rolled outer edges to prevent visible separation cracking. This expanded wing control joint minimizes cracking and assures proper plaster and stucco thickness. The applied plastic tape keeps the reveal clean and is removed easily after the finish application.

The #XJ15 enables plaster to key into the return lip to eliminate shrinkage separation, a preferred finish feature. The joint is taped, preventing stucco from getting caught inside during installation and providing a neatly finished job upon completion.

The #XJ15 Double-J Control Joint is also available in galvanized steel for instances when increased corrosion resistance is not required.

Product Data & Ordering Information:

Material: .018 99.97% pure Zinc, compliant with ASTM B-69
Also available in G-60 Hot-Dipped Galvanized Steel
Dimensions: Nominal 2-7/8" Full Wing Flange

Ground	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Skid
1/2"	10'	24	240	54 lbs.	27
3/4"	10'	24	240	69 lbs.	30
7/8"	10'	24	240	76 lbs.	30



ASTM & Code Standards:

- ASTM C1063
- Zinc meets or exceeds requirements of ASTM B69
- Installation: ASTM C841 (interior), C1063 (exterior) and EMLA-920
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

09.22.36 (Metal Lath)

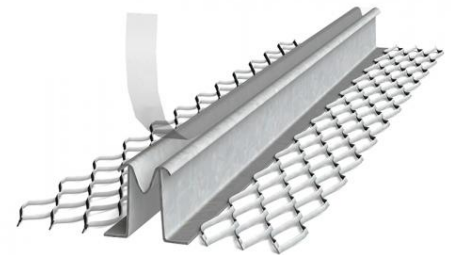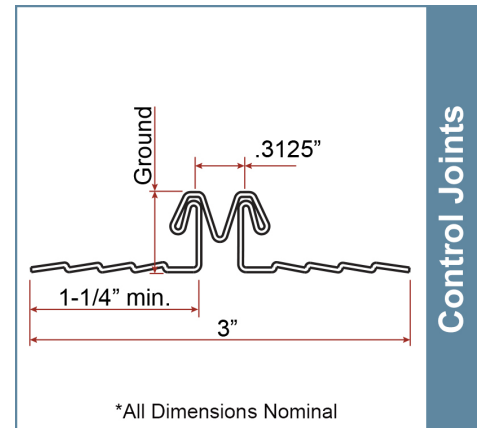

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: