

#1A Expanded Corner Bead (CBXA)

Galvanized steel expanded flange corner bead for exterior corners

A solid nose, all-purpose exterior corner bead. Strong and economical with multiple general use purposes.

The wide, expanded-wing flanges are flexible and can compensate for most irregular surfaces providing even grounds and straight corners. The expanded steel near the nose of the corner bead provides multiple plastering and stucco keys allowing for reinforcement and strength where it is needed the most. In addition to reinforcing corners, the #1A Corner Bead can also be used as a return accessory around any recessed opening or as a corner for spray-applied fireproofing when the column of bead is boxed in.

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution, and high humidity. The #1A Corner Bead is available in Zinc for approved corrosion resistance.

Product Data & Ordering Information:

Material: .0172 base steel, 26 Gauge, G-60 Hot-Dipped Galvanized Steel.
Also available in 99.97% pure Zinc, compliant with ASTM B-69.
Dimensions: Nominal 2-7/8" Full Wing Flange

Length	Pcs./Ctn.	Ft./Ctn.	Ctn./Skid	Wt./Ctn.
10'	30	300'	20	49 lbs.

ASTM & Code Standards:

- ASTM C841 (interior), C1063, CE 240.01 (exterior), ASTM C926, UBC, ML/SFA-920, the International Code Council IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69 as required in ASTM C1063 and C847.
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- For installation and placement instructions refer to ASTM C1063, C841 and C926.
- Intertek CCRR-0204

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED


LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

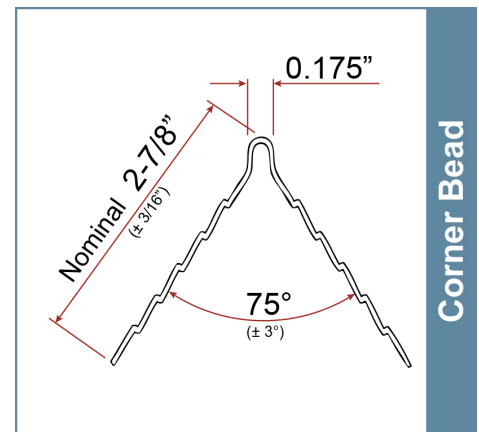

- Provides true, straight and accurate corners
- Flexible for irregular surfaces

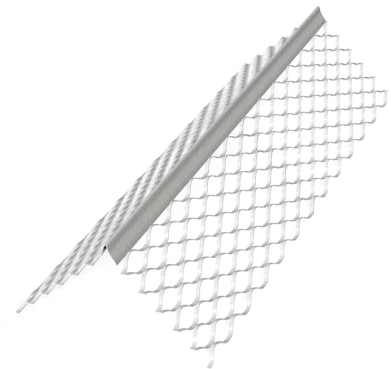

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: