

#2A Expanded Corner Bead (CBXX)

Rigid, expanded flange corner bead for exterior corners

A more rigid expanded corner bead for reinforcing plaster/stucco corners when used with masonry and fire proofing beads and columns. The #2A Corner Bead provides extra strength and rigidity by incorporating a wider 3-1/4" flange with an added stiffener ridge. The Double-X is an ideal choice for corners in high-traffic areas.

Strong and economical with multiple general use purposes, the wider, expanded-wing flanges are flexible and can compensate for most irregular surfaces, providing straight corners and even grounds with extra strength. Used to reinforce Portland cement stucco at external corners.

Galvanized steel products should not be used with Portland cement stucco containing calcium chloride additives or magnesium oxychloride cement stucco. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as high humidity, salt air, and industrial pollution. The #2A Corner Bead is available in Zinc for approved corrosion resistance.

Product Data & Ordering Information:

Material: 26 Gauge, G-60 Hot-Dipped Galvanized Steel
 Dimensions: 3-1/4" Full Wing Flange available in 10' lengths

Length	Pcs./Ctn.	Ft./Ctn.	Ctn./Skid	Wt./Ctn.
10'	30	300'	20	66 lbs.

ASTM & Code Standards:

- ASTM C841 (interior), C1063 (exterior), CE 240.01 (exterior), ASTM C926, ML/SFA-920, the International Code Council 2006 IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M.
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs
- For installation and placement instructions refer to ASTM C1063, C841 and C926.

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

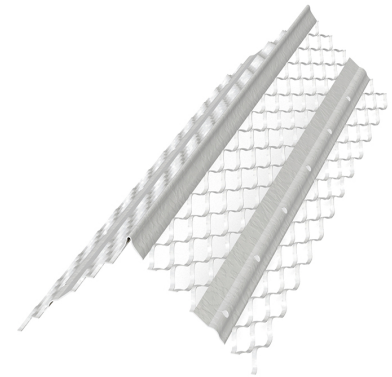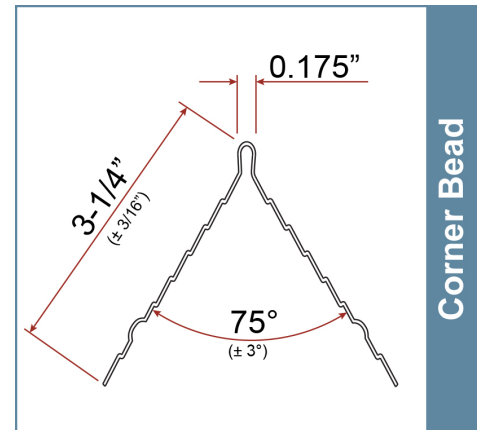

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: