

Barrier Mesh™ for Security (BM75)

High-strength expanded metal mesh for walls and ceilings

Barrier Mesh™ is a tough, rigid, heavy-gauge steel mesh installed typically onto stud framing (both metal and wood), with gypsum sheathing applied to its surface to conceal the barrier mesh, thereby providing a significant barrier to security breach across that wall system. ClarkDietrich Building Systems' Barrier Mesh™ (BM) can also be used without sheathing to provide an enhanced protection of security to walls, ceilings as well as floors. Barrier Mesh™ is produced in different size diamonds and gauges for minimum, medium or maximum security protection.

In addition to providing high-strength and fire-resistant protection, Barrier Mesh™ also offers a cost effective and time-saving alternative to reinforced concrete or concrete masonry systems. The Barrier Mesh™ System is designed to attach to metal or wood stud framing, with specially designed Barrier Mesh™ clips, purchased with the Barrier Mesh and shipped together, as a system. ClarkDietrich mesh sheets are 4'x 8' and sizes in chart below; special order mesh sizes available upon requests with additional lead-time.

Projects uses:

Correctional facilities, government offices, retail stores, computer rooms, airport security, law enforcement facilities, military facilities or any space that requires substantial barrier protection.

Product Data & Ordering Information:

Material: Type II, Class 1 - Carbon Steel - Mesh, Complying to ASTM F1267 & A1011
 (Type II, Class 2 - Galvanized available by special order)
 Expanded Metals Manufacturers Association - EMMA 557-15

Sheet Size: 48" x 96" (Tolerance -0, +1/4" / foot of dimension, length & width)

Product Code	Nom. Gauge	Overall Thickness	Diamond	Bond Size Center-to-Center	Weight lbs/100 sq ft	% Of Open Area
BM75	16	.048"	3/4"	.923" x 2.10"	47	76
BM75	13	.072"	3/4"	.923" x 2.10"	67	77
BM75	9	.108"	3/4"	.923" x 2.10"	157	65

ASTM & Code Standards:

- ASTM F1267 - Standard Specification for Metal, Expanded, Steel (Type II, Class 1 - Carbon Steel, Type II, Class 2 - Galvanized, Type II, Class 3 - Stainless Steel)
- ASTM A1011/A1011M - Standard Specification for Steel Sheet, Hot-Rolled, High-Strength Low-Alloy Carbon
- Permitted for use in UL - Wall Assemblies, see UL R19331 for full listing
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

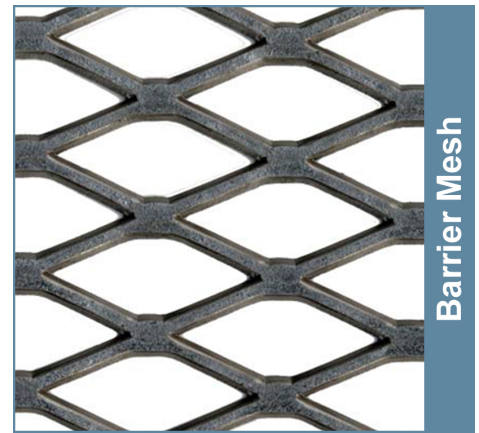

- Protects against break-ins and break-outs on metal stud framing
- Ideal for use in lieu of reinforced concrete or concrete block
- High-strength and fire-resistant
- Made from carbon steel
- Permitted for use in UL - Wall Assemblies



(BM-Clip) Barrier Mesh™ Clip
 2.75" long x 1.5" wide high-strength steel clips used to attach Barrier Mesh to framing studs. 300 clips/carton

Project Information

Name:
 Address:

Contractor Information

Name:
 Contact:
 Phone:
 Fax:

Architect Information

Name:
 Contact:
 Phone:
 Fax: