

## Bullnose Splayed Corner Bead

### 3/4" and 1-1/2" Bullnose Splayed Corner Bead

Bullnose splayed corner bead is used to finish off-angle interior corners from 120 - 135° when a rounded bullnose look is desired. Bullnose bead provides an architecturally attractive, contemporary and open feel to any room. This durable trim product is dent resistant, rust-proof and easily finished. Multiple perforations along both flanges enhance joint compound bond. Available in 3/4" and 1-1/2" radius.

#### Product Data & Ordering Information:

Dimension: 3/4" & 1-1/2" Radius

Product code	Radius	Flanges	Length	Pcs./Ctn.
BSB75-8	3/4"	7/8"	8'	35
BSB75-9	3/4"	7/8"	9'	35
BSB75-10	3/4"	7/8"	10'	35
BSB150-8	1-1/2"	7/8"	8'	30
BSB150-10	1-1/2"	7/8"	10'	30


#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (interior finishes)
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

#### 09.22.00 (Support for Plaster & Gypsum Board)

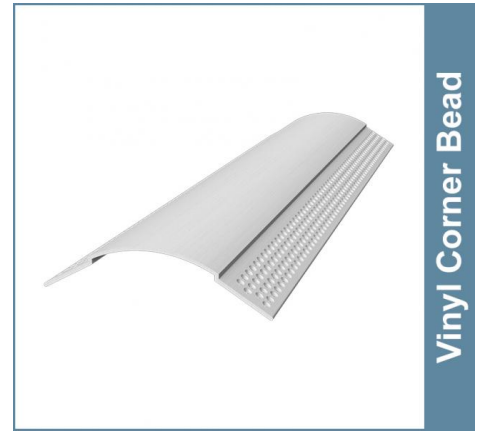

- Rust proof and dent resistant
- Multiple perforations enhance joint compound bond
- Flexibility allows snug fit on unusual outside corner angles
- Easily cut with snips, utility knives or scissors

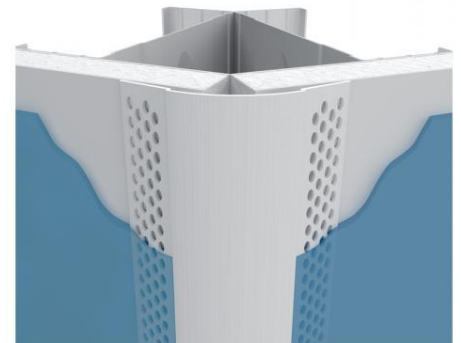

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: