

(CD10) ClarkDietrich Holdown (CD Series) 7 Gauge (179mil) 13-1/2" Tall Shearwall Holdown

ClarkDietrich Holdowns provide cost-effective shearwall attachment and are used to transfer tension loads between floors or from structural members to the foundation. Two-piece welded construction comes in three sizes for optimal performance. Installation is made easy with prepunched holes.

For allowable shear, tension and moment loads, see load tables at www.clarkdietrich.com/Holdown

Product Data & Ordering Information:

Material: 7 Gauge steel with 1/2" bearing plate
 Coating: HSLAS-F GR 50
 Thickness: 7 Gauge (179mil)
 0.188" Design thickness
 0.179" Minimum thickness
 Dimensions: 2-5/8" x 3-7/16" x 13-1/2" Tall (66.7mm x 87.3mm x 343mm)
 Packaging: Packaged individually
 Product Weight: 4.0 lb / piece

ASTM & Code Standards:

- Meets or exceeds requirements of ASTM A36 & A1011
- SDS & Product Certification Information available at www.clarkdietrich.com/SupportDocs

Alternative Products:


- EasyClip™ T-Series™ Tall Anchor Clip

05.40.00 (Cold-Formed Metal Framing)



Rigid Connections

- 7/8" x 1-1/8" Anchor Hole
- Available sizes: 11", 13-1/2" and 19" Tall
- Cost-effective shearwall attachment

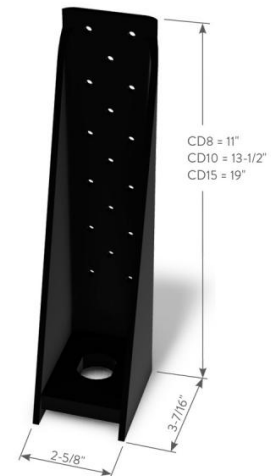

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: