

Clinch-On Hot-Dipped Corner Bead (CBCS)

Metal Corner Bead

Hot-dipped corner bead provided by Clinch-On Products, Co. offers the identical roll-formed precision as its counterpart. Hot-dipped galvanized metal corner bead provides enhanced corrosion protection and sturdy reinforcement at exposed 90° corners. Flanges are knurled and perforated to ease joint compound adhesion and nail attachment. Hot-dipped galvanized metal meets ASTM C1047.

Product Data & Ordering Information

Material: 0.0125 min thickness, G30 galvanized
Dimensions: 1-1/4" leg x 1-1/4" leg

Width	Length	Wt./Ctn.	Pcs./Ctn.
1-1/4" x 1-1/4"	6'-9"	46 lbs	75
1-1/4" x 1-1/4"	7'	47 lbs	75
1-1/4" x 1-1/4"	8'	46 lbs	63
1-1/4" x 1-1/4"	9'	47 lbs	56
1-1/4" x 1-1/4"	10'	45 lbs	50
1-1/4" x 1-1/4"	12'	54 lbs	50

ASTM & Code Standards

- ASTM C1047
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



- Clinch-On Products, Co. provides premium, high-quality finishing beads and trims
- Sturdy metal reinforcement for 90° drywall corners
- Hot-dipped galvanized for corrosion protection

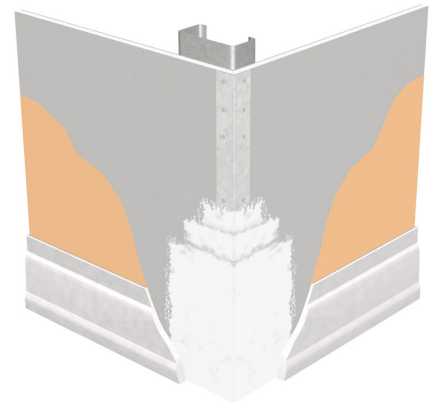

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: