

## Commercial Strapping - CS2-150-33

**Multipurpose pre-punched commercial coil stock used for bracing, bridging or tension strapping**

Coil Strapping is made in a variety of widths, each with a unique layout of pre-punch holes for a variety of fastening options to meet different application requirements.

### Product Data & Ordering Information:

Material:	50 ksi
Coating:	G60
Thickness:	33mil (20 ga) 0.0346" Design thickness 0.0329" Minimum thickness
Width:	2"
Packaging:	150 foot Boxed Coil
Product Weight:	34 lbs/coil

### Allowable Tension Load for: CS2-150-33 33mil (20 ga) - 2" Wide Commercial Strapping


Stud / Joist / Framing Thickness	33mil (20ga) 33ksi	43mil (18ga) 33ksi	54mil (16ga) 50ksi	68mil (14ga) 50ksi	Allowable Strap Tension
#10 Fasteners per Each End of Strap	8	6	6	6	1367 lbs

### ASTM & Code Standards:


- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

### Alternative Products:

- Flat Strapping

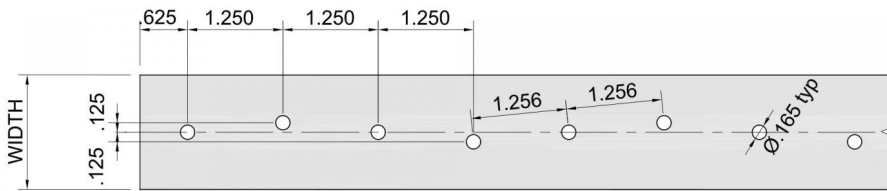

## 05.40.00 (Cold-Formed Metal Framing)

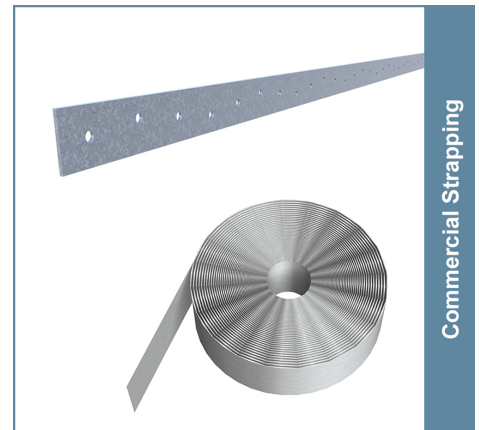

- Widths Available: 1", 1-1/2", 2", 2-1/2" & 3"
- Available in 20, 18, 16 & 14 gauge
- Pre-punched for fast and accurate fastener attachment



### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax: