

Commercial Strapping - CS2-150-43

Multipurpose pre-punched commercial coil stock used for bracing, bridging or tension strapping

Coil Strapping is made in a variety of widths, each with a unique layout of pre-punch holes for a variety of fastening options to meet different application requirements.

Product Data & Ordering Information:

Material:	50 ksi
Coating:	G90 (Z275) hot-dipped galvanized
Thickness:	43mill (18 ga) 0.0451" Design thickness 0.0428" Minimum thickness
Width:	2"
Packaging:	150 foot Boxed Coil
Product Weight:	45.4 lbs/coil

Allowable Tension Load for: CS2-150-43 43mill (18 ga) - 2" Wide Commercial Strapping


Stud / Joist / Framing Thickness	33mil (20ga) 33ksi	43mil (18ga) 33ksi	54mil (16ga) 50ksi	68mil (14ga) 50ksi	Allowable Strap Tension
#10 Fasteners per Each End of Strap	11	7	6	6	1782 lbs

ASTM & Code Standards:


- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at www.clarkdietrich.com/SupportDocs

Alternative Products:

- Flat Strapping

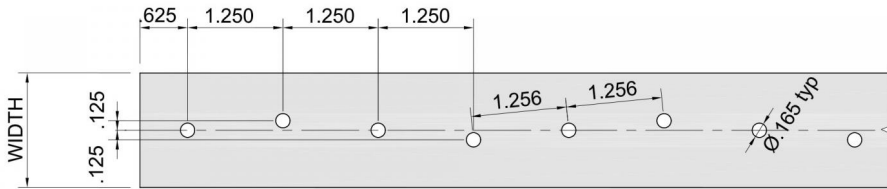

05.40.00 (Cold-Formed Metal Framing)

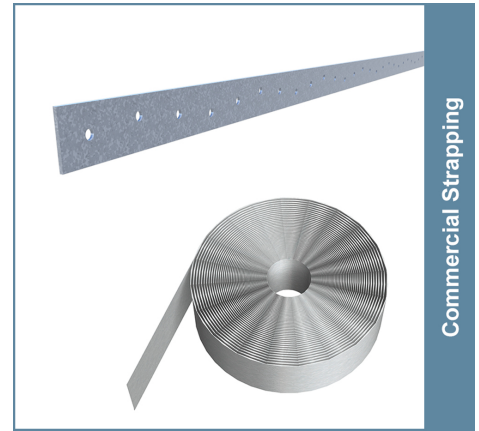

- Widths Available: 1", 1-1/2", 2", 2-1/2" & 3"
- Available in 20, 18, 16 & 14 gauge
- Pre-punched for fast and accurate fastener attachment



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: