

D683 EasyClip™ D-Series™ 14 Gauge (68mil) Anchor Clips

ClarkDietrich EasyClip D-Series™ Anchor Clips are high-performance, cost-effective solutions for knee wall-to-foundation connections, light-duty shear wall-to-foundation connections and truss-to-wall connections. These multi-application clips feature reinforced stiffening ribs that provide superior design values for maximum performance. The EasyClip D-Series™ Anchor Clips are designed to resist horizontal, torsional and vertical (uplift) loads. These clips are prepunched with a series of attachment holes including anchor bolt, kwik-con and screw holes, for efficient and accurate fastener placement.

For allowable loads for multiple connection options, reference the Clip & Connector Catalog or www.clarkdietrich.com for more information.

Product Data & Ordering Information:

| | |
|-----------------|---|
| Material: | Structural Grade 50 Type H (ST50H), 50ksi (340 MPa) |
| Coating: | G90 (Z275) hot-dipped galvanized coating |
| Thickness: | 14 Gauge (68mil) 0.0713" Design thickness 0.0677" Minimum thickness |
| Dimensions: | 2" x 2" x 3-1/2" (50.8mm x 50.8mm x 88.9mm) |
| Packaging: | 40 pieces per bucket |
| Product Weight: | 0.28 lb / piece |


ASTM & Code Standards:

- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at www.clarkdietrich.com/SupportDocs


Alternative Products:

- EasyClip™ A-Series™ End Clip

05.40.00 (Cold-Formed Metal Framing)

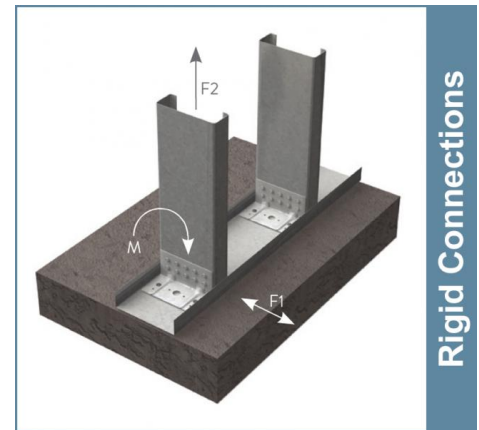
Rigid Connections

- 2" x 2" legs
- Available lengths: 3-1/2" and 5-1/2"
- Available in 14 and 12 gauge
- Resist uplift, horizontal & rotational loads

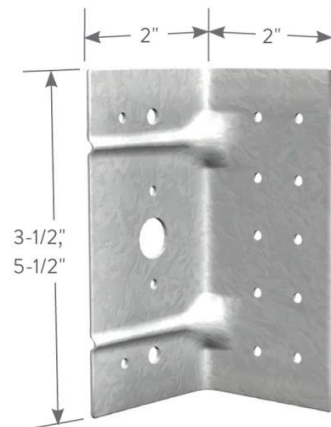

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: