

## D975 EasyClip™ D-Series™ 12 Gauge (97mil) Anchor Clips

ClarkDietrich EasyClip D-Series™ Anchor Clips are high-performance, cost-effective solutions for knee wall-to-foundation connections, light-duty shear wall-to-foundation connections and truss-to-wall connections. These multi-application clips feature reinforced stiffening ribs that provide superior design values for maximum performance. The EasyClip D-Series™ Anchor Clips are designed to resist horizontal, torsional and vertical (uplift) loads. These clips are prepunched with a series of attachment holes including anchor bolt, kwik-con and screw holes, for efficient and accurate fastener placement.

For allowable loads for multiple connection options, reference the Clip & Connector Catalog or [www.clarkdietrich.com](http://www.clarkdietrich.com) for more information.

### Product Data & Ordering Information:

Material: Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)  
 Coating: G90 (Z275) hot-dipped galvanized coating  
 Thickness: 12 Gauge (97mil)  
                   0.1017" Design thickness  
                   0.0966" Minimum thickness  
 Dimensions: 2" x 2" x 5-1/2" (50.8mm x 50.8mm x 140mm)  
 Packaging: 40 pieces per bucket  
 Product Weight: 0.63 lb / piece


### ASTM & Code Standards:

- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

### Alternative Products:


- EasyClip™ A-Series™ End Clip

### 05.40.00 (Cold-Formed Metal Framing)

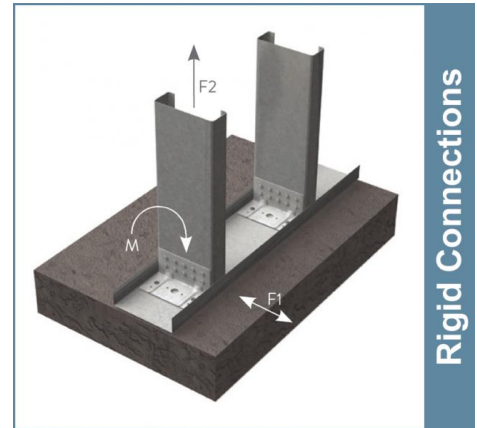

Rigid Connections

- 2" x 2" legs
- Available lengths: 3-1/2" and 5-1/2"
- Available in 14 and 12 gauge
- Resist uplift, horizontal & rotational loads

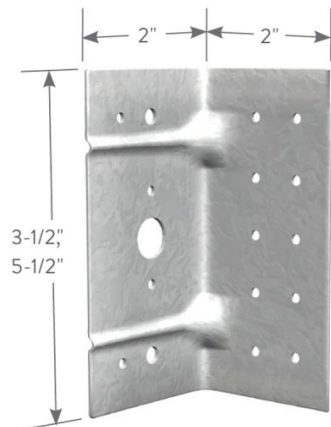

### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: