

Furring / Hat Channel

Product category 1-1/2" Furring / Hat Channel - 43mils (18ga)
Product name 150F125-43 (33ksi)
Coating CP60 per ASTM C955 (G90 Available)

Geometric Properties

Depth 1.500 in
Width 1.250 in
Design Thickness 0.0451 in
Min. steel thickness 0.0428 in
Yield stress, Fy 33ksi
Ultimate, Fu 45ksi

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A) 0.225 in²
Member weight per foot of length 0.764 lb/ft
Moment of inertia (Ix) 0.071 in⁴
Radius of gyration (Rx) 0.563 in
Gross moment of inertia (Iy) 0.119 in⁴
Gross radius of gyration (Ry) 0.728 in

Effective Section Properties, Strong Axis

Moment of inertia for deflection (Ix) 0.071 in⁴
Section modulus (Sx) 0.091 in³
Allowable bending moment (Ma) 149.7 ft-lb
Allowable shear force (Va) 613 lb

Product Data & Ordering Information:

Stock length 10'-0" and 12'-0" long pieces
Packaging 10 pieces per bundle - 440 pieces per pallet
Packaging weight 79 lbs/bundle

ASTM & Code Standards:

- AISI North American Specification [NASPEC] S100-12
- ASTM C645 - Standard Specification for Nonstructural Steel Framing Members
- ASTM C955 - Standard Specification for Cold-Formed Steel Structural Framing Members
- ASTM A1003 - Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
- For installation & storage information refer to ASTM C754 or C1007
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Furring / Hat Channel Allowable Ceiling Spans (Deflection: L/360)

Dead Load Hat Spacing o.c.	4 psf 12"	4 psf 16"	4 psf 24"	6 psf 12"	6 psf 16"	6 psf 24"	13 psf 12"	13 psf 16"	13 psf 24"
Single Span	9'-2"	8'-4"	7'-4"	8'-0"	7'-4"	6'-4"	6'-2"	5'-8"	4'-11"
Multiple Span	11'-4"	10'-4"	9'-0"	9'-11"	9'-0"	7'-11"	7'-8"	7'-0"	6'-1"

For more ceiling span tables and table notes see:

<https://www.clarkdietrich.com/products/drywall-framing/furring-channel-hat-channel>


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.16 (Non-Structural Metal Framing)

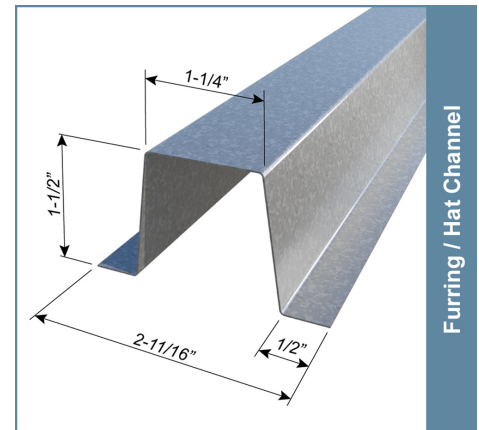

Used in framing applications:

- Furring for walls & ceilings
- Furring out masonry walls
- Framing for drop ceilings assemblies

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: