

**Product category:** HDS® - 3" Flange Heavy Duty Stud  
**Product name:** **800HDS300-33 (33ksi, CP60, U) - Unpunched**  
33mils (20ga) Coating: CP60

## Geometric Properties

|                    |          |                      |           |
|--------------------|----------|----------------------|-----------|
| Web depth          | 8.000 in | Design thickness     | 0.0346 in |
| Flange width (A)   | 3.000 in | Min. steel thickness | 0.0329 in |
| Return leg (B)     | 2.250 in | Yield strength, Fy   | 33ksi     |
| Stiffening lip (C) | 0.750 in |                      |           |

## Gross Section Properties of Full Section, Strong Axis

|                                  |                       |
|----------------------------------|-----------------------|
| Cross sectional area (A)         | 0.679 in <sup>2</sup> |
| Member weight per foot of length | 2.310 lb/ft           |
| Moment of inertia (Ix)           | 6.134 in <sup>4</sup> |
| Section modulus (Sx)             | 1.533 in <sup>3</sup> |
| Radius of gyration (Rx)          | 3.005 in              |
| Moment of inertia (Iy)           | 1.122 in <sup>4</sup> |
| Section modulus (Sy)             | 0.665 in <sup>3</sup> |
| Radius of gyration (Ry)          | 1.285 in              |


## Torsional Properties

|   |                        |
|---|------------------------|
| St. Venant torsion constant (J x 1000)          | 0.272 in <sup>4</sup>  |
| Warping constant (Cw)                           | 33.350 in <sup>6</sup> |
| Distance from shear center to neutral axis (Xo) | -3.412 in              |
| Radii of gyration (Ro)                          | 4.725 in               |
| Torsional flexural constant (Beta)              | 0.479                  |

## Effective Section Properties, Strong Axis

(See next page)

## 05.40.00 (Cold-Formed Metal Framing)

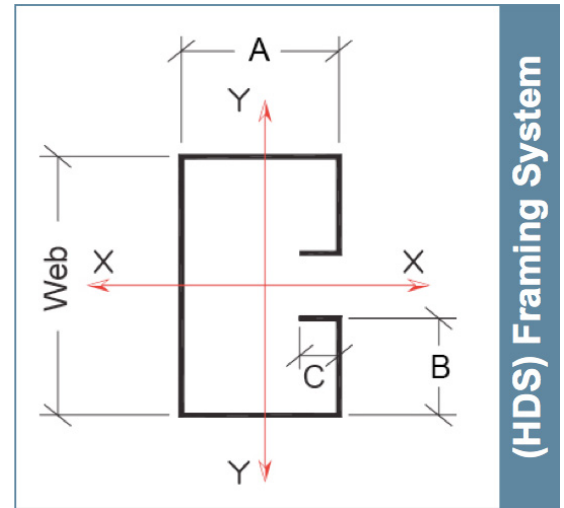

## Applications

- Curtainwall headers, jambs & sills
- Load-bearing jambs or Shearwall posts
- Heavily loaded or long-span wall studs
- Built-up tube truss chords & webs
- Reduces material pieces, weight & screws
- All profiles are unpunched in the East Coast

## ASTM & Code Standards:

- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- MSDS & Product Certification Information is available at [www.clarkdietrich.com](http://www.clarkdietrich.com)

## Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

## Project Information

Name:  
Address:

## Contractor Information

Name:  
Contact:  
Phone:  
Fax:

## Architect Information

Name:  
Contact:  
Phone:  
Fax:

**Product category:** HDS® - 3" Flange Heavy Duty Stud  
**Product name:** **800HDS300-33 (33ksi, CP60, U) - Unpunched**  
33mils (20ga) Coating: CP60

(Continued from page 1)


## Effective Section Properties

|   |                       |
|---|-----------------------|
| Moment of inertia about x-axis for deflection (I <sub>xe</sub> )    | 5.805 in <sup>4</sup> |
| Moment of inertia about y-axis for deflection (I <sub>ye</sub> )    |                       |
| Web in Tension:   | 1.076 in <sup>4</sup> |
| Web in Compression:   | 0.703 in <sup>4</sup> |
| Section modulus about x-axis (S <sub>xe</sub> )                     | 1.084 in <sup>3</sup> |
| Section modulus about y-axis (S <sub>ye</sub> )                     |                       |
| Web in Tension:   | 0.548 in <sup>4</sup> |
| Web in Compression:   | 0.333 in <sup>4</sup> |
| Allowable bending moment about x-axis (M <sub>xa</sub> )            | 21420 in-lb           |
| Allowable bending moment about y-axis (M <sub>ya</sub> )            |                       |
| Web in Tension:   | 10829 in-lb           |
| Web in Compression:   | 6570 in-lb            |
| Maximum unbraced length to attain M <sub>xa</sub> (L <sub>u</sub> ) | 113 in                |
| Allowable shear force in web about x-axis (V <sub>x</sub> )         | 0.47 kips             |
| Allowable shear force in web about y-axis (V <sub>y</sub> )         | 2.05 kips             |
| Allowable web crippling (P <sub>x</sub> )*                          | ~ kips                |
| Allowable end one flange web crippling (P <sub>y</sub> )*           | 0.38 kips             |

## Section Property Notes

- Unless otherwise noted, properties are computed according to the AISI-NASPEC, 2001 with 2004 supplement.
- \* P<sub>x</sub> and P<sub>y</sub> are the allowable reactions based on web crippling with P<sub>y</sub> being for members bent about the y-axis.
- P<sub>x</sub> = For members having a web depth of less than 8" and also having a thickness less than 97mil, allowable web crippling has been determined in accordance with AISI Standard for CFS Framing Wall Stud Design - 2004. This value assumes the web resists web crippling and the HDS is nested in track having the same or greater thickness. For other members, allowable End One Flange Web Crippling is calculated in accordance with AISI NAS-2001 with 2004 supplement. Both calculation procedures use a bearing length of 1-1/4."
- P<sub>y</sub> = Allowable End One Flange Web Crippling per AISI NAS-2001 with 2004 supplement. This value assumes two flanges resist web crippling for a bearing length of 1-1/4."
- Punched properties are based on the standard 1-1/2" x 4" oval ClarkDietrich web knockout. The knockout is centered about the web, and is spaced no less than 24" on-center.
- This profile section h/t exceeds 200. Web stiffeners are required at bearing points. No holes in the web are permitted.

## 05.40.00 (Cold-Formed Metal Framing)

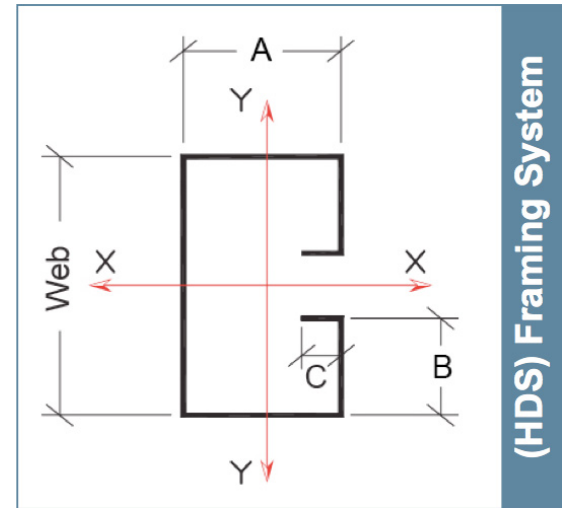

## Applications

- Curtainwall headers, jambs & sills
- Load-bearing jambs or Shearwall posts
- Heavily loaded or long-span wall studs
- Built-up tube truss chords & webs
- Reduces material pieces, weight & screws
- All profiles are unpunched in the East Coast

## ASTM & Code Standards:

- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- MSDS & Product Certification Information is available at [www.clarkdietrich.com](http://www.clarkdietrich.com)

## Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

## Project Information

Name:  
Address:

## Contractor Information

Name:  
Contact:  
Phone:  
Fax:

## Architect Information

Name:  
Contact:  
Phone:  
Fax: