

## L-Angle

### 1-1/4" x 1-1/4" standard L-Angle

A standard 10'-0" long galvanized steel product, which is often field cut to job site conditions for the ultimate use as a connector for framing members. On interior framing it is often used to secure drywall at corner intersections or along horizontal planes. It can also be used as a half track in chase and furred walls.

#### Product Data & Ordering Information:

**Material:** All non-structural material: Grade 33ksi min. yield strength  
18mils (25ga), 0.0188" Design Thickness, 0.0179" Min. Thickness  
30mils (20ga DW), 0.0312" Design Thickness, 0.0296" Min. Thickness

**Coating:** G40EQ (G40 or G60 available)

**Material:** All Structural Material: Grade 33ksi min. yield strength  
33mils (20ga STR), 0.0346" Design Thickness, 0.0329" Min. Thickness  
43mils (18ga), 0.0451" Design Thickness, 0.0428" Min. Thickness  
54mils (16ga), 0.0566" Design Thickness, 0.0538" Min. Thickness  
68mils (14ga), 0.0713" Design Thickness, 0.0677" Min. Thickness  
97mils (12ga), 0.1017" Design Thickness, 0.0966" Min. Thickness

**Coating:** CP60 (G90 available)

**Dimensions:** 1-1/4" leg x 1-1/4" leg angle

**Stock Lengths:** 10'-0" long (Custom lengths available by special order)


#### ASTM & Code Standards:

- Structural framing is produced to meet or exceed ASTM C955
- Drywall framing is produced to meet or exceed ASTM C645
- Galvanized sheet steel meets or exceeds requirements of A653 and A1003
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

#### Related Accessories:


- ClarkDietrich SwiftClip L-Series Clips

#### 09.22.16 (Non-Structural Metal Framing)

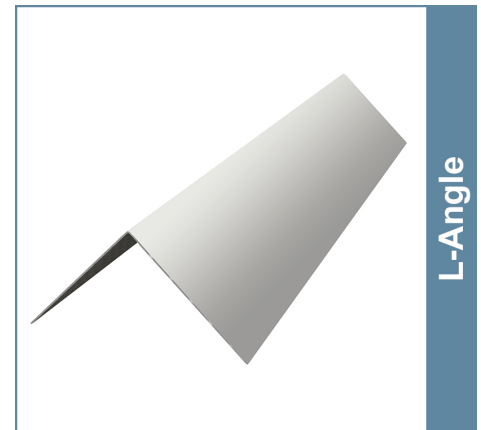

Used in framing applications:

- Framing connections
- Corner intersections
- Half track connections

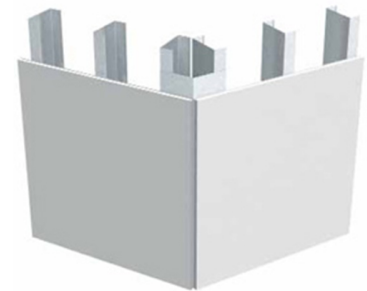

#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: