

L-Angle

1-1/2" x 1-1/2" standard L-Angle

A standard 10'-0" long galvanized steel product, which is often field cut to job site conditions for the ultimate use as a connector for framing members. On interior framing it is often used to secure drywall at corner intersections or along horizontal planes. It can also be used as a half track in chase and furred walls.

Product Data & Ordering Information:

Material: All non-structural material: Grade 33ksi min. yield strength
18mils (25ga), 0.0188" Design Thickness, 0.0179" Min. Thickness
30mils (20ga DW), 0.0312" Design Thickness, 0.0296" Min. Thickness

Coating: G40EQ (G40 or G60 available)

Material: All Structural Material: Grade 33ksi min. yield strength
33mils (20ga STR), 0.0346" Design Thickness, 0.0329" Min. Thickness
43mils (18ga), 0.0451" Design Thickness, 0.0428" Min. Thickness
54mils (16ga), 0.0566" Design Thickness, 0.0538" Min. Thickness
68mils (14ga), 0.0713" Design Thickness, 0.0677" Min. Thickness
97mils (12ga), 0.1017" Design Thickness, 0.0966" Min. Thickness

Coating: CP60 (G90 available)

Dimensions: 1-1/2" leg x 1-1/2" leg angle

Stock Lengths: 10'-0" long (Custom lengths available by special order)


ASTM & Code Standards:

- Structural framing is produced to meet or exceed ASTM C955
- Drywall framing is produced to meet or exceed ASTM C645
- Galvanized sheet steel meets or exceeds requirements of A653 and A1003
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Related Accessories:


- ClarkDietrich SwiftClip L-Series Clips

09.22.16 (Non-Structural Metal Framing)

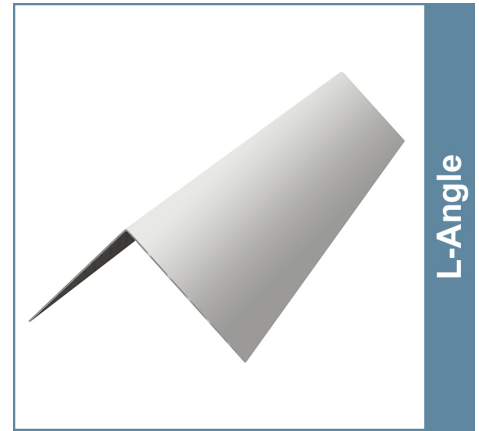

Used in framing applications:

- Framing connections
- Corner intersections
- Half track connections

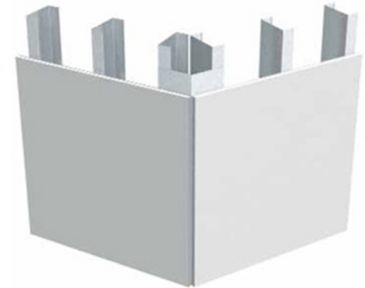

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: