

Pony Wall Lite 24" (LGPW24)

Partial wall framing connection to floor

ClarkDietrich Pony Wall Lite is intended to support out-of-plane loading of cantilevered partial wall systems that are unsupported at the top track. Out-of-plane loads are transferred to the floor system through the base-plate, which is welded to the Pony Wall Lite stud member.


For allowable loads and multiple connection options, reference www.clarkdietrich.com/ponywall for more information.

Product Data & Ordering Information:

Plate Material:	ASTM A36 3/8" thick hot rolled steel
Stud Material:	Structural Grade 50 Type H (ST50H), 50ksi (340 MPa) 16ga (54mil), 0.0566" Design thickness, 0.0538" Min. thickness
Plate Dimensions:	2-3/8" x 5-1/2" x 3/8" thick (60.3mm x 139.7mm x 9.5mm)
Stud Dimensions:	2-1/2" x 1-5/8" x 23-1/4" tall (63.5mm x 41.3mm x 590.6mm)
Packaging:	Individually
Product weight:	3.5 lb/piece

ASTM & Code Standards:


- Sheet steel meets or exceeds requirements of ASTM A1003
- SDS & Product Certification Information available at www.clarkdietrich.com/SupportDocs



05.40.00 (Cold-Formed Metal Framing)



- Anchors wall to floor with 3/8" anchors

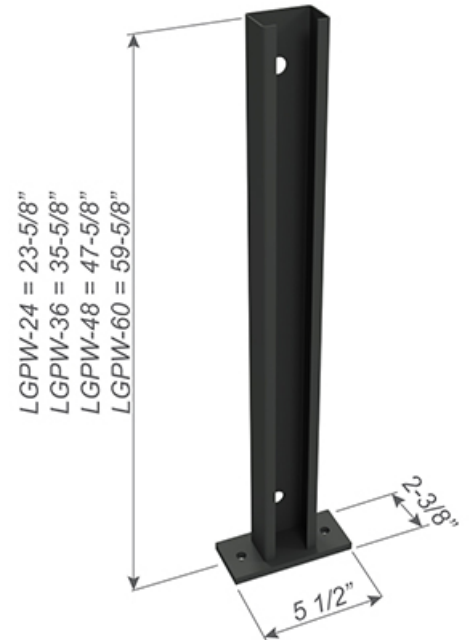

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: