

Product category: PRO350 (3-1/2" flange RedHeader PRO) As Jamb
Product name: **600PRO350-54 (50ksi, CP60) - Punched**
 54mils (16ga) Coating: CP60 per ASTM C955

Geometric Properties

Web depth	6.000 in	Design thickness	0.0566 in
Flange width	3.500 in	Min. steel thickness	0.0538 in
Stiffening lip	1.000 in	Yield strength, Fy	50 ksi

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.825 in ²
Member weight per foot of length	2.81 lb/ft
Moment of inertia (Ix)	5.023 in ⁴
Section modulus (Sx)	1.674 in ³
Radius of gyration (Rx)	2.467 in
Gross moment of inertia (Iy)	1.491 in ⁴
Gross section modulus (Sy)	0.671 in ³
Gross radius of gyration (Ry)	1.344 in

Effective Section Properties, Strong Axis

Moment of inertia for deflection (Ixe)	4.722 in ⁴
Section modulus (Sxe)	1.335 in ³
Allowable bending moment (Max - Local)	39.98 in-k
Allowable bending moment (Max - Distortional)	36.57 in-k
Allowable shear force in web (Vax)	1947 lb

Torsional Properties


St. Venant torsion constant (J x 1000)	0.881 in ⁴
Warping constant (Cw)	12.942 in ⁶
Distance from shear center to neutral axis (Xo)	-3.037 in
Radii of gyration (Ro)	4.137 in
Torsional flexural constant (Beta)	0.461

Unbraced length (Lu) 74.4 in

ASTM & Code Standards:

- AISI S100-12 and S100-07 w/S2-10 supplements
- Effective properties incorporate the strength increase from cold work of forming
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- SDS & Product Certification Information is available at www.clarkdietrich.com

05.40.00 (Cold-Formed Metal Framing)

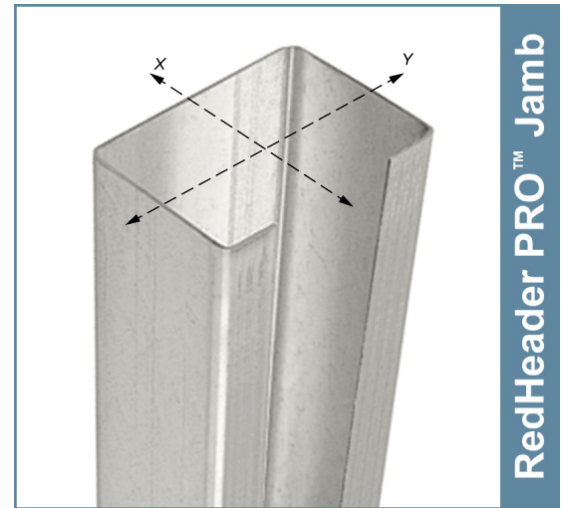

RedHeader PRO™ Jamb

- Eliminates and/or minimizes built-up jams.
- Reduces material pieces, weight & screws.
- Opened jamb does not require pre-insulating.



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: