

## Self-Furring V-Groove Lath

### 1/4" Self-Furring V-Groove expanded steel plaster or stucco base

Self-Furring V-Groove Metal Lath is manufactured with five, approximately 1/4" deep, embossed "V" ribs, spaced 6" on center along the length of the sheet. The V's allow thorough embedment into and behind the lath for superior mechanical bonding. A self-furring expanded V-Grooved metal lath, ideal for interior and exterior use over masonry, sheathing, and other solid surfaces as required per ASTM C847, ASTM C1780, ASTM C1063.

The V-grooved self-furring plaster base is manufactured with evenly spaced indentations, 6" apart which run the length of the lath sheet holding the metal lath a consistent 1/4" away from the surface to be plastered.

The V-groove provides an ideal point of attachment of the fastener to achieve ASTM C1063 compliance. V-grooved metal lath is available with or without a Grade-D asphalt paper-backing, weather resistant barrier.

#### Product Data & Ordering Information:

Material: G60 Galvanized Steel  
 Packaged: 25 bundles or 250 pieces per pallet

Product Code	Wt. per Sq. Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
LAV	2.5 lbs.	27" x 97"	10	20	500
LAV	3.4 lbs.	27" x 97"	10	20	500

#### ASTM & Code Standards:

- Material: ASTM C847
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A653/A653M.
- Intertek CCRR-0204 - Metal Lath - Code Compliance Research Report
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- Installation: ASTM C1063 (exterior), ASTM C841 (interior), ASTM C1780 (thin veneer stone).

#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination per ASTM C847 & C1063.

#### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.



#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

### 09.22.36 (Metal Lath)

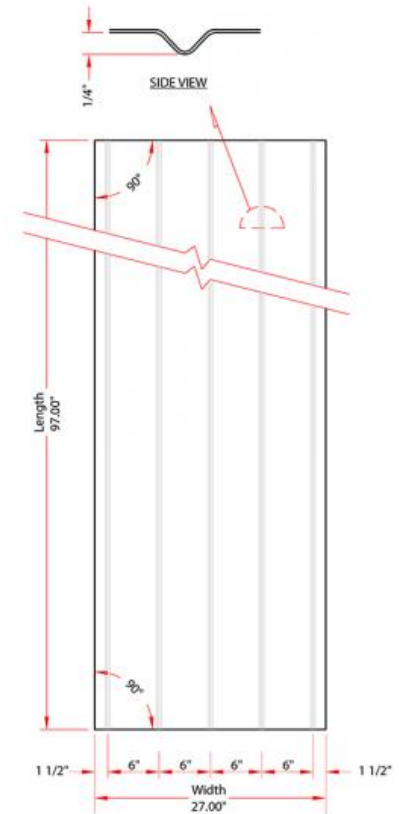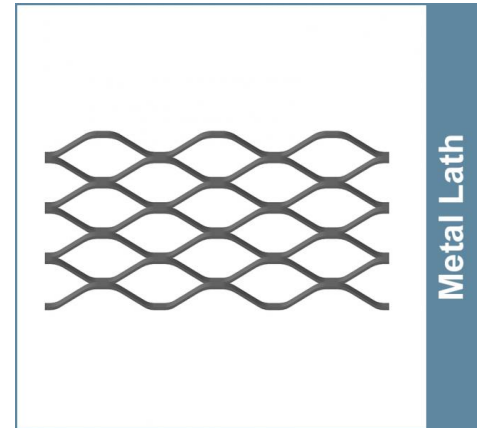

#### Project Information

Name:  
 Address:

#### Contractor Information

Name:  
 Contact:  
 Phone:  
 Fax:

#### Architect Information

Name:  
 Contact:  
 Phone:  
 Fax: