

## (SD12) Slide Clip™ Vertical Slide Clip

### 12 Gauge Vertical Deflection Clip

ClarkDietrich SD slide clips are used to attach exterior curtainwall studs to the building structure and provide for vertical building movement independent of the cold-formed steel framing. SD slide clips are used in by-pass framing situations and are normally welded or otherwise fastened to the vertical leg of a structural angle at the floor or roof edge. Normally a stand-off exists between the structural angle and the inside flange of the curtainwall stud. This will require the installation of an extra stud piece to bridge the stand-off. In order to avoid the extra installation costs, the ClarkDietrich FastClip™ products are recommended in place of the SD clip.

For allowable loads for multiple connection options, reference the Clip & Connector Catalog or [www.clarkdietrich.com](http://www.clarkdietrich.com) for more information.

#### Product Data & Ordering Information:

Material: Mill-certified SS Grade 50ksi (340 MPa)  
Coating: G90 (Z275) hot-dipped galvanized coating  
Thickness: 12 Gauge (97mil) 0.1017" design thickness  
0.0966" minimum thickness  
Dimensions: 2-3/8" x 5" (60.3mm x 127mm)  
Packaging: (50) pieces per bucket/box  
Product Weight: 0.84 lb. / piece

#### ASTM & Code Standards:

- Galvanized sheet steel meets or exceeds requirements of ASTM A1003  
MSDS & Product Certification Information available at [www.clarkdietrich.com](http://www.clarkdietrich.com)

#### Alternative Products:

- Fast Clip™, EXTENDED Fast Clip™, FastStrut™

#### GREEN Benefits and Recycled Content:


**LEED Credit MR 2** - ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream. The contribution to LEED must be calculated by the contractor based on weight or volume.

**LEED Credit MR 4** - ClarkDietrich's steel products have a minimum recycled content of 34.9%, of which 24.3% is post-consumer, and 9.4% is pre-consumer. To report a higher number for your project or seek Credit MR 5, contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com](http://www.clarkdietrich.com).

#### 05.40.00 (Cold-Formed Metal Framing)



- First-generation low-cost deflection clip
- Offset for easier welding
- Requires additional framing components for horizontal stud adjustment.

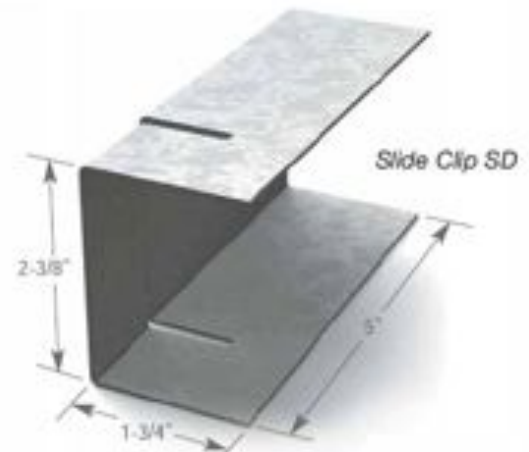

CD-SD12 © 07/11 ClarkDietrich Building Systems

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: