

## Spazzer® 5400 Spacing and Bridging Bar - 16ga (SPZS-54) 54mils (16ga) Spazzer 5400 (Exterior) Spacing and Bridging Bar

The Spazzer 5400 bar is a prenotched bridging and spacing bar engineered to facilitate the rapid erection of structural wall framing.

Spazzer 5400 (SPZS-54) bar is a prenotched, 16-gauge (54mil), 50" long galvanized steel spacer and bridging bar, engineered to facilitate the rapid erection of exterior curtainwall framing, load-bearing walls and high interior partitions constructed of structural studs.

For load-bearing studs or for 20-gauge nonload-bearing studs, the Spazzer 5400 Bar Guard™ bar retainer clip, the Spazzer Snap-In Grommet or screws are required to keep the bar in place. Spazzer bar should not be used in studs over 8" wide.

### Product Data & Ordering Information:

Material: Grade 50ksi min. (340MPa)  
 Coating: CP60 (G90 available)  
 Thickness: 16ga (54mil), 0.0566" Design Thickness, 0.0538" Min. Thickness  
 Dimensions: 1-1/4" x 1-1/4" (31.8mm x 31.8mm)  
 Stock Lengths: 50" Long (1270mm)  
 Packaging: 20 pieces per carton / 680 pieces per skid  
 Product Weight: 2.03 lb/piece


### ASTM & Code Standards:

- Spazzer 5400 Spacing and Bridging Bar is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

### Alternative Products:

- U-channel (CRC) with clip angles
- Blocking and Strapping

### 05.40.00 (Cold-Formed Metal Framing)

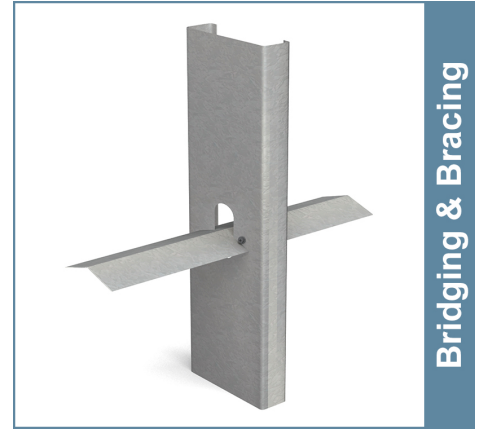

- Saves up to 40% in combined labor and material costs.
- Prenotched at 12", 16" and 24" intervals, so no layout is needed.
- Eliminates clip angles and the labor required to install them.



### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

### Project Information

Name:  
Address:

### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax: