

Spazzer® Snap-In Grommet (SPGR)

Used to secure the Spazzer® bar

The Spazzer® Snap-In Grommet should be used to secure the Spazzer bar when used in load-bearing applications. ClarkDietrich TradeReady® Spazzer® 5400 spacer bar is a pre-notched, 16-gauge, galvanized steel spacer and bridging bar, engineered to facilitate the rapid, efficient erection of exterior curtain wall framing, loadbearing walls and high interior partitions constructed of structural studs.

Product Data & Ordering Information:

Product code	Size (in)	Packaging Pcs/Ctn
SPGR	1-1/2 x 4	100


Load-Bearing Wall Installation:

The TradeReady Spazzer 5400 bar is passed through the stud knockouts and rotated 90° into position, engaging each side of the knockout. For load-bearing studs, the Spazzer 5400 bar guard bar retainer clip and the Spazzer snap-in grommet both require screws to keep the bar in place. The TradeReady Spazzer 5400 bar should be installed at a maximum 4' o.c. vertically or per specification, and should not be used in studs over 6" wide.

Non-Load-Bearing Wall Installation:

The TradeReady Spazzer 5400 bar is passed through the stud knockouts and rotated 90° into position, engaging each side of the knockout. For 20 gauge studs, the Spazzer 5400 bar guard bar retainer clip and the Spazzer snap-in grommet both require screws to keep the bar in place. The TradeReady Spazzer 5400 bar should be installed at maximum 5' o.c. vertically or per specification, and should not be used in studs over 6" wide.

09.22.16 (Non-Structural Metal Framing)

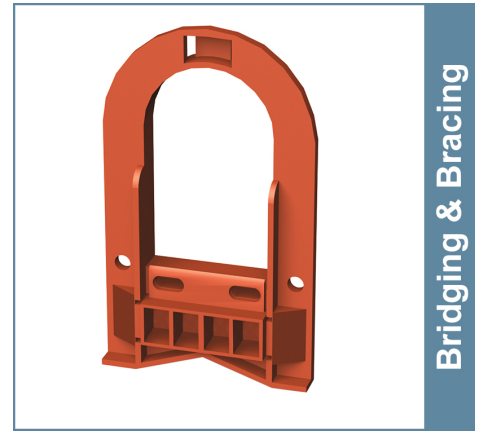

Bridging & Bracing

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: