Product Submittal Sheet

Technical Services: 888-437-3244
Engineering Services: 877-832-3206
Sales: 800-543-7140
clarkdietrich.com

Product category: S162 (1-5/8" Flange Structural Stud)
Product name: **725S162-33 (33ksi, CP60) P - Punched**
33mils (20ga)
Coating: CP60 per ASTM C955
Color coding: White

05.40.00 (Cold-Formed Metal Framing)

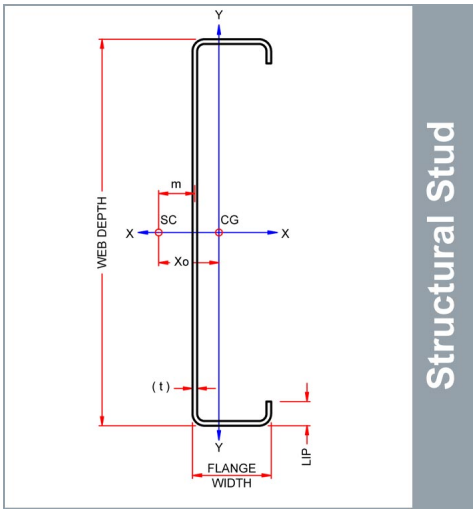

Geometric Properties

Web depth	7.250 in		
Flange width	1.625 in	Punchout width	1.50 in
Stiffening lip	0.500 in	Punchout length	4.00 in
Design thickness	0.0346 in	Min. steel thickness	0.0329 in
Yield strength, Fy	33 ksi	Fy with Cold-Work, Fya	33.0 ksi
Ultimate, Fu	45.0 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.388 in^2
Member weight per foot of length	1.32 lb/ft
Moment of inertia (Ix)	2.822 in^4
Section modulus (Sx)	0.779 in^3
Radius of gyration (Rx)	2.699 in
Gross moment of inertia (Iy)	0.122 in^4
Gross radius of gyration (Ry)	0.562 in

Effective Section Properties, Strong Axis

Effective Area (Ae)	0.178 in^2
Moment of inertia for deflection (Ix)	2.706 in^4
Section modulus (Sx)	0.638 in^3
Allowable bending moment (Ma)	12.61 in-k
Allowable moment based on distortion buckling (Mad)	11.48 in-k
Allowable shear force in web (solid section)	525 lb
Allowable shear force in web (perforated section)	525 lb
Unbraced length (Lu)	40.5 in

Torsional Properties

St. Venant torsion constant (J x 1000)	0.155 in^4
Warping constant (Cw)	1.309 in^6
Distance from shear center to neutral axis (Xo)	-0.982 in
Distance between shear center and web centerline (m)	0.630 in
Radii of gyration (Ro)	2.926 in
Torsional flexural constant (Beta)	0.887

Web-depth to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.

Used in framing applications:

- **Load-bearing walls**
- **Curtain walls**
- **Tall interior walls**
- **Floor & ceiling joists**
- **Trusses**



Structural Punchout

East market punchout spacing:
12" from lead end then 24" o.c.

West market punchout spacing:
24" from lead end then 24" o.c.

ASTM & Code Standards:

- AISI North American Specification [NASPEC] S100-12
- * Effective properties incorporate the strength increase from the cold work of forming
- Gross properties are based on the cross section away from the punchouts
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- ClarkDietrich's structural and nonstructural framing comply with the SFIA Code Compliance Certification Program, ICC-ES ESR-1166P and Intertek CCRR-0206
- For installation & storage information refer to ASTM C1007
- SDS & Product Certification Information is available at itools.clarkdietrich.com

Sustainability Credits:
For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED
LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).
LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax:

CD-STRS © 07/18 ClarkDietrich Building Systems