Product Submittal Sheet

Technical Services: 888-437-3244
Engineering Services: 877-832-3206
Sales: 800-543-7140
clarkdietrich.com

Product category: S162 (1-5/8" Flange Structural Stud)
Product name: **725S162-43 (33ksi, CP60) P - Punched**
43mils (18ga)
Coating: CP60 per ASTM C955
Color coding: Yellow

05.40.00 (Cold-Formed Metal Framing)

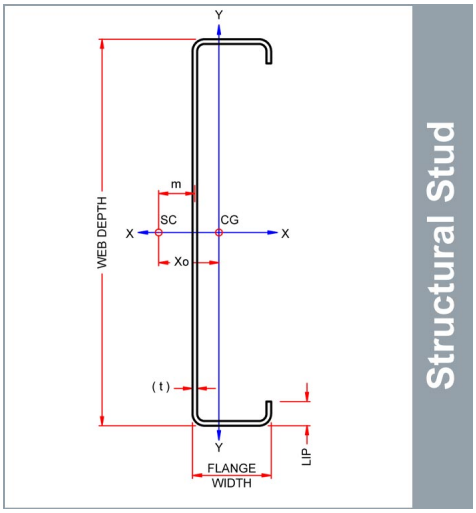

Geometric Properties

Web depth	7.250 in		
Flange width	1.625 in	Punchout width	1.50 in
Stiffening lip	0.500 in	Punchout length	4.00 in
Design thickness	0.0451 in	Min. steel thickness	0.0428 in
Yield strength, Fy	33 ksi	Fy with Cold-Work, Fya	36.3 ksi
Ultimate, Fu	45.0 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.503 in^2
Member weight per foot of length	1.71 lb/ft
Moment of inertia (Ix)	3.649 in^4
Section modulus (Sx)	1.007 in^3
Radius of gyration (Rx)	2.693 in
Gross moment of inertia (Iy)	0.156 in^4
Gross radius of gyration (Ry)	0.557 in

Effective Section Properties, Strong Axis

Effective Area (Ae)	0.258 in^2
Moment of inertia for deflection (Ix)	3.585 in^4
Section modulus (Sx)	0.897 in^3
Allowable bending moment (Ma)	19.49 in-k
Allowable moment based on distortion buckling (Mad)	17.68 in-k
Allowable shear force in web (solid section)	1163 lb
Allowable shear force in web (perforated section)	1163 lb
Unbraced length (Lu)	38.3 in

Torsional Properties

St. Venant torsion constant (J x 1000)	0.341 in^4
Warping constant (Cw)	1.666 in^6
Distance from shear center to neutral axis (Xo)	-0.972 in
Distance between shear center and web centerline (m)	0.623 in
Radii of gyration (Ro)	2.917 in
Torsional flexural constant (Beta)	0.889

ASTM & Code Standards:

- AISI North American Specification [NASPEC] S100-12
- * Effective properties incorporate the strength increase from the cold work of forming
- Gross properties are based on the cross section away from the punchouts
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- ClarkDietrich's structural and nonstructural framing comply with the SFIA Code Compliance Certification Program, ICC-ES ESR-1166P and Intertek CCRR-0206
- For installation & storage information refer to ASTM C1007
- SDS & Product Certification Information is available at itools.clarkdietrich.com

Used in framing applications:

- **Load-bearing walls**
- **Curtain walls**
- **Tall interior walls**
- **Floor & ceiling joists**
- **Trusses**



Structural Punchout

East market punchout spacing:
12" from lead end then 24" o.c.

West market punchout spacing:
24" from lead end then 24" o.c.

Sustainability Credits:
For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED
LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).
LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information	Contractor Information	Architect Information
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax:

CD-STRS © 07/18 ClarkDietrich Building Systems