

**Product category:** S300 (3" Flange Structural Stud)  
**Product name:** 1200S300-54 (50ksi, CP60) P - Punched  
 54mils (16ga) Coating: CP60 per ASTM C955  
 Color coding: Green

### Geometric Properties

Web depth	12.000 in	Punchout width	1.50 in
Flange width	3.000 in	Punchout length	4.00 in
Stiffening lip	0.625 in	Min. steel thickness	0.0538 in
Design thickness	0.0566 in	Fy with Cold-Work, Fya	50.0 ksi
Yield strength, Fy	50 ksi		
Ultimate, Fu	65.0 ksi		

### Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	1.066 in <sup>2</sup>
Member weight per foot of length	3.63 lb/ft
Moment of inertia (I <sub>x</sub> )	21.705 in <sup>4</sup>
Section modulus (S <sub>x</sub> )	3.618 in <sup>3</sup>
Radius of gyration (R <sub>x</sub> )	4.513 in
Gross moment of inertia (I <sub>y</sub> )	1.074 in <sup>4</sup>
Gross radius of gyration (R <sub>y</sub> )	1.004 in

### Effective Section Properties, Strong Axis

Effective Area (A <sub>e</sub> )	0.352 in <sup>2</sup>
Moment of inertia for deflection (I <sub>x</sub> )	21.045 in <sup>4</sup>
Section modulus (S <sub>x</sub> )	2.273 in <sup>3</sup>
Allowable bending moment (M <sub>a</sub> )	68.04 in-k
Allowable moment based on distortion buckling (M <sub>ad</sub> )	60.68 in-k
Allowable shear force in web (solid section)	1377 lb
Allowable shear force in web (perforated section)	1377 lb
Unbraced length (L <sub>u</sub> )	57.4 in

### Torsional Properties

St. Venant torsion constant (J x 1000)	1.138 in <sup>4</sup>
Warping constant (C <sub>w</sub> )	30.051 in <sup>6</sup>
Distance from shear center to neutral axis (X <sub>o</sub> )	-1.743 in
Distance between shear center and web centerline (m)	1.111 in
Radii of gyration (R <sub>o</sub> )	4.941 in
Torsional flexural constant (Beta)	0.876

Web-depth to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.

### ASTM & Code Standards:

- AISI North American Specification [NASPEC] S100-12
- \* Effective properties incorporate the strength increase from the cold work of forming
- Gross properties are based on the cross section away from the punchouts
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- ClarkDietrich's structural and nonstructural framing products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)
- For installation & storage information refer to ASTM C1007
- SDS & Product Certification Information is available at [tools.clarkdietrich.com](https://tools.clarkdietrich.com)


### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)


### 05.40.00 (Cold-Formed Metal Framing)

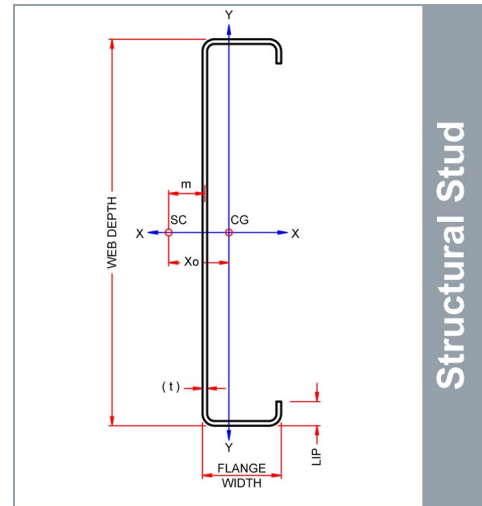

Structural Stud

#### Used in framing applications:

- Load-bearing walls
- Curtain walls
- Tall interior walls
- Floor & ceiling joists
- Trusses



**Structural  
Punchout**

East market punchout spacing:  
 12" from lead end then 24" o.c.

West market punchout spacing:  
 24" from lead end then 24" o.c.

#### Project Information

Name:  
 Address:

#### Contractor Information

Name:  
 Contact:  
 Phone:  
 Fax:

#### Architect Information

Name:  
 Contact:  
 Phone:  
 Fax: