

Product category: (TLD) TRAKLOC Deflection Stud
Product name: 400TLD125-33 33ksi G40 - Punched
4" TRAKLOC Stud 33 mils (20ga)

Coating: G40
Color coding: White

Geometric Properties

Web depth	4.000 in	Weight	0.806 lb/ft
Flange width	1.250 in	Punchout width	1.500 in
Stiffening lip	0.288 in	Punchout length	4.000 in
Design thickness	0.0347 in	Minimum thickness	0.0330 in
Yield stress, F_y	33 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.237 in ²
Moment of inertia (Ix)	0.561 in ⁴
Radius of gyration (Rx)	1.540 in
Gross moment of inertia (Iy)	0.045 in ⁴
Gross radius of gyration (Ry)	0.437 in

Effective Section Properties, Strong Axis

Effective area (Ae)	0.118 in ²
Moment of inertia for deflection (Ixe)	0.557 in ⁴
Section modulus (Sxe)	0.232 in ³
Allowable bending moment - Local buckling (Mal)	4587 in-lbs
Allowable bending moment - Distortional buckling (Mad)	5225 in-lbs
Allowable shear force in web (Unpunched) (Vag)	967 lb
Allowable shear force in web (Punched) (Vanet)	598 lb

Torsional Properties

St. Venant torsion constant (J x 1000)	0.0945 in ⁴
Warping constant (Cw)	0.147 in ⁶
Distance from shear center to neutral axis (Xo)	-0.821 in
Radii of gyration (Ro)	1.799 in
Torsional flexural constant (Beta)	0.792

Stud/track end reaction (Rx)	114 lbs
Unbraced Length (Lu)	29.1 in

Notes:

- Calculated properties are based on AISI S100-07 w/ S2-10 Supplement and AISI S100-12, North American Specification for Design of Cold-Formed Steel Structural Members.
- Gross and torsional properties are based on full-unreduced cross section of the studs, away from punch-outs.
- The allowable moment based on local buckling (Mal) is based on the compression flange continuously braced.
- The distortional buckling moment (Mad) does not consider the beneficial effect of sheathing to rotational stiffness.
- For deflection calculations, use the effective moment of inertia.
- Stud/Track End Reaction (Rx) is the maximum end reaction (web crippling) capacity based on a minimum bearing length of 1 inch.
- East Coast Punch Pattern: Center of knockouts are 12" from the leading edge then 48" o.c.
- West Coast Punch Pattern: Center of knockouts are 24" from the leading edge then 24" o.c.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.16 (Non-Structural Metal Framing)

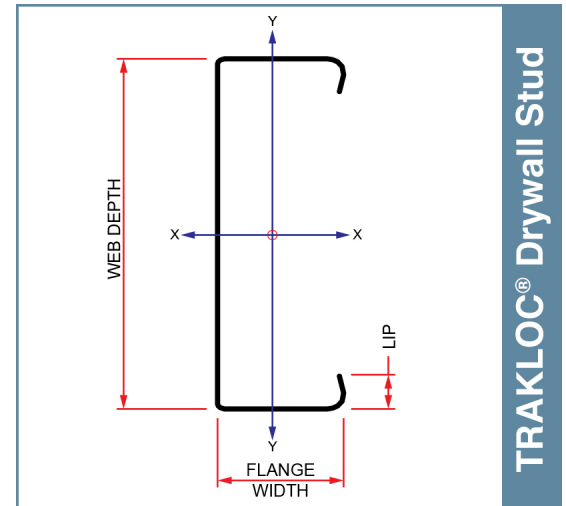

ASTM & Code Standards:

- AISI-NASPEC 2007 w/S2-10
- Meets or exceeds ASTM C645
- ICC ESR-1464 - Evaluation Report
- SDS & Product Certification Information available at www.clarkdietrich.com



Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax:

Product category: (TLD) TRAKLOC Deflection Stud
Product name: 400TLD125-33 33ksi G40 - Punched
 4" TRAKLOC Stud 33 mils (20ga)

4" TRAKLOC Stud 33 mils (20ga) Drywall Stud - COMPOSITE Limiting Heights (AC86-2012)

(1 layer) 5/8" Type X Gypsum Board

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	27'-7"	22'-9"	19'-11"	24'-1"	19'-10"	17'-6"	21'-10"	18'-1"	15'-11"
16	25'-0"	20'-8"	18'-2"	21'-10"	18'-1"	15'-11"	19'-10"	16'-5"	14'-5"
24	21'-10"	18'-1"	15'-11"	19'-1"	15'-9"	13'-11"	17'-4"	14'-4"	12'-8"

Composite Table Notes:


- Allowable composite limiting heights were determined in accordance with ICC-ES AC86-2012.
- Additional composite wall testing and analysis requirements of the SFIA Code Compliance Certification Program were observed.
- In accordance with current building codes and AISI design standards, the 1/3 Stress Increase for strength was not used.
- The composite limiting heights provided in the tables are based on a single layer of 5/8" Type X Gypsum Board complying with ASTM C1396 and from the following manufacturers: American Gypsum, CertainTeed, Georgia Pacific, Continental, National Gypsum or USG.
- The gypsum board must be applied full height in the vertical orientation to each stud flange and installed in accordance with ASTM C754 using minimum No. 6 Type S fine thread Drywall bugle head screws spaced as listed below:
 - Screws spaced a maximum of 16 inch on-center to framing members spaced at 12 inch on-center.
 - Screws spaced a maximum of 12 inch on-center to framing members spaced at 16 inch or 24 inch on-center.
 - Screws spaced 16 inch on-center to the top and bottom track.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754.
- Stud end bearing must be a minimum of 1 inch.
- The minimum overlap of the TSO (Outer Stud) and TSE (Inner Stud) must be 8 inches and the maximum un-lapped length of the TSE must be 4 inches.
- f: Adjacent to the height value indicates that flexural stress controls the allowable wall height.
- s: Adjacent to the height value indicates that shear/end reaction controls the allowable wall height.

4" TRAKLOC Stud 33 mils (20ga) Drywall Stud - NON-COMPOSITE Limiting Heights (FULLY BRACED)

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	24'-5"	19'-5"	16'-11"	20'-2"	19'-1"	16'-8"	17'-6"	17'-4"	15'-2"
16	21'-5"	17'-8"	15'-5"	17'-6"	17'-4"	15'-2"	15'-2"	15'-2"	13'-9"
24	17'-6"	15'-5"	13'-5"	14'-3"	14'-3"	13'-3"	12'-4"	12'-4"	12'-0"

Non-Composite Table Notes:

- Heights are based on AISI S100-07 w/S2-10 Supplement, and AISI S100-12 Specification using steel properties alone.
- Compression flange must be continuously braced.
- End bearing must be 1 inch.
- The minimum overlap of the TSO (Outer Stud) and TSE (Inner Stud) must be 8 inches and the maximum un-lapped length of the TSE must be 4 inches.
- e: Web stiffeners are required at the stud/track connection.

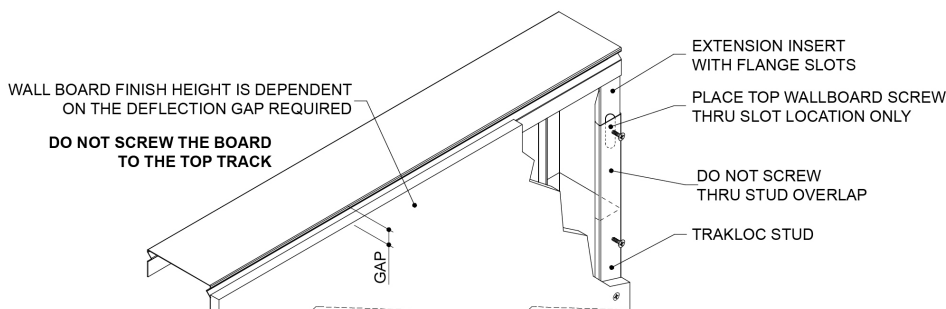

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: